



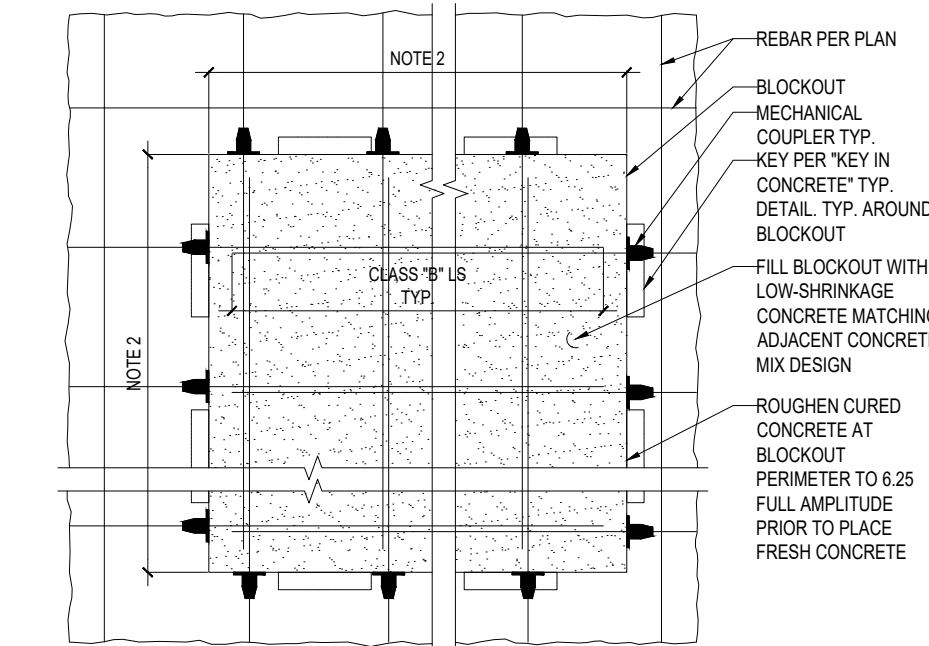

- NOTES:
1. PROVIDE BLOCKOUTS WHERE NOTED ON PLANS OR OBTAIN APPROVAL IN WRITING FROM CONSULTANT.
 2. UNLESS SPECIFIED ELSEWHERE IN THE DRAWING SET, SIZE OF BLOCKOUTS SHALL BE THE LEAST REQUIRED FOR CONSTRUCTIBILITY REQUIREMENTS AND DEVELOPMENT BAR LENGTH.
 3. AT GC DISCRETION AND AS COST SAVING SOLUTION, MECHANICAL COUPLERS MAY BE OMITTED IF REBAR ARE CONTINUOUS THRU BLOCKOUT


GENERIC BLOCKOUT

SCALE: N.T.S.

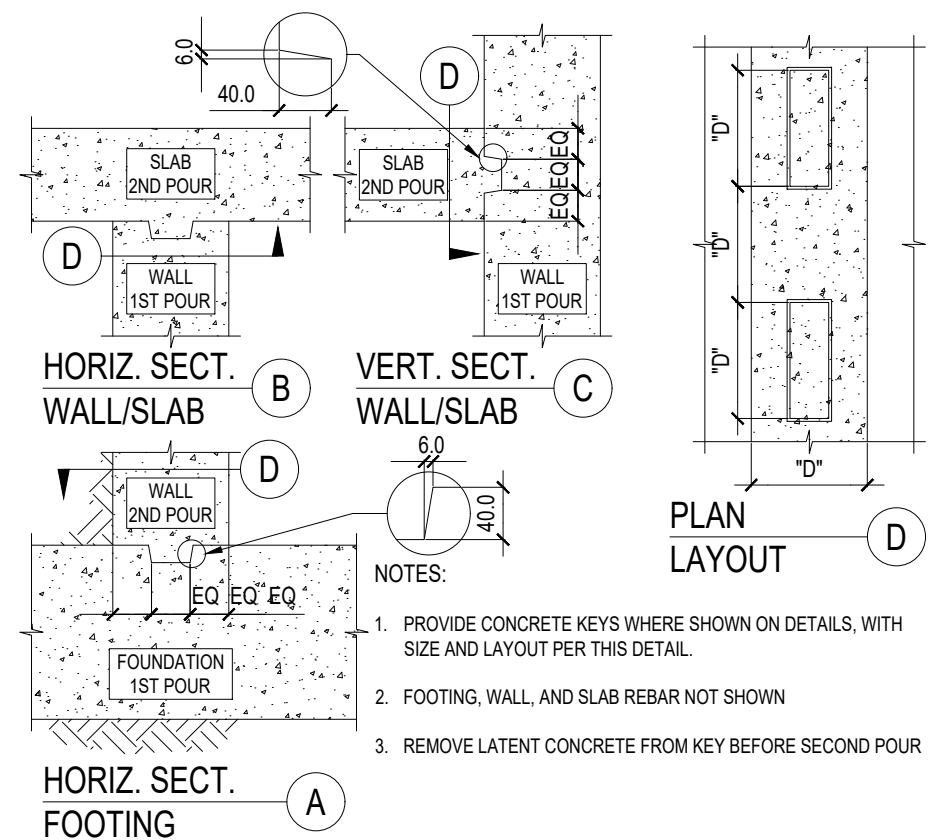


KEY IN CONCRETE

SCALE: N.T.S.

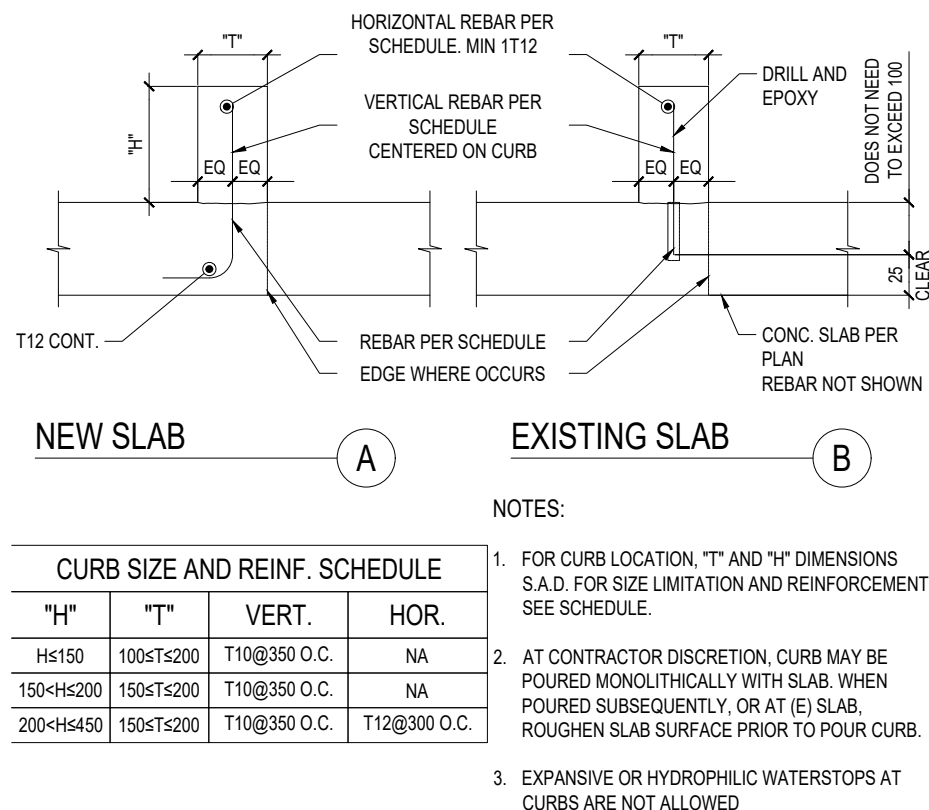


CONCRETE CURB DETAIL

SCALE: N.T.S.

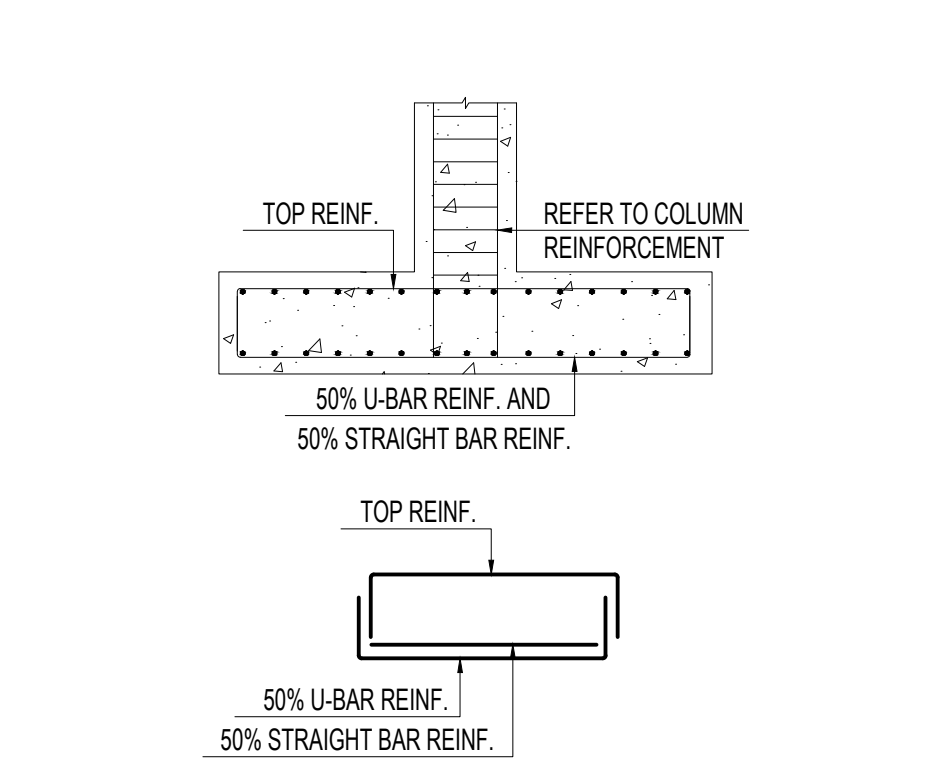


BOTTOM REINF. FOR FTG W/ S < 200mm

SCALE: N.T.S.

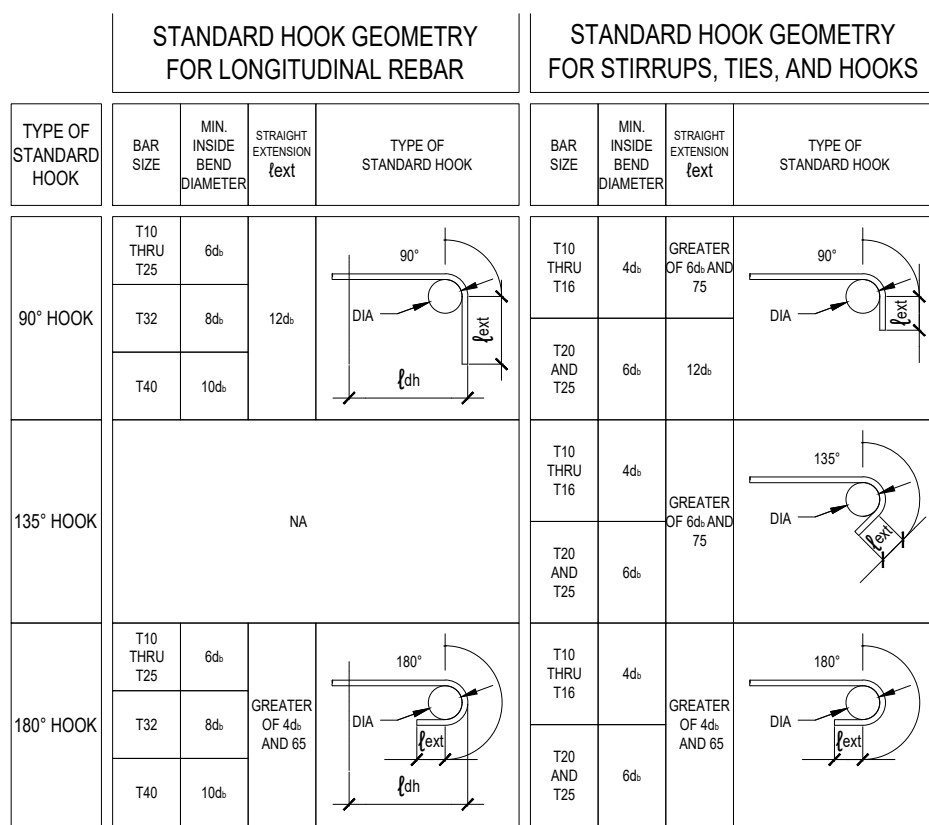


STANDARD HOOKS

SCALE: N.T.S.

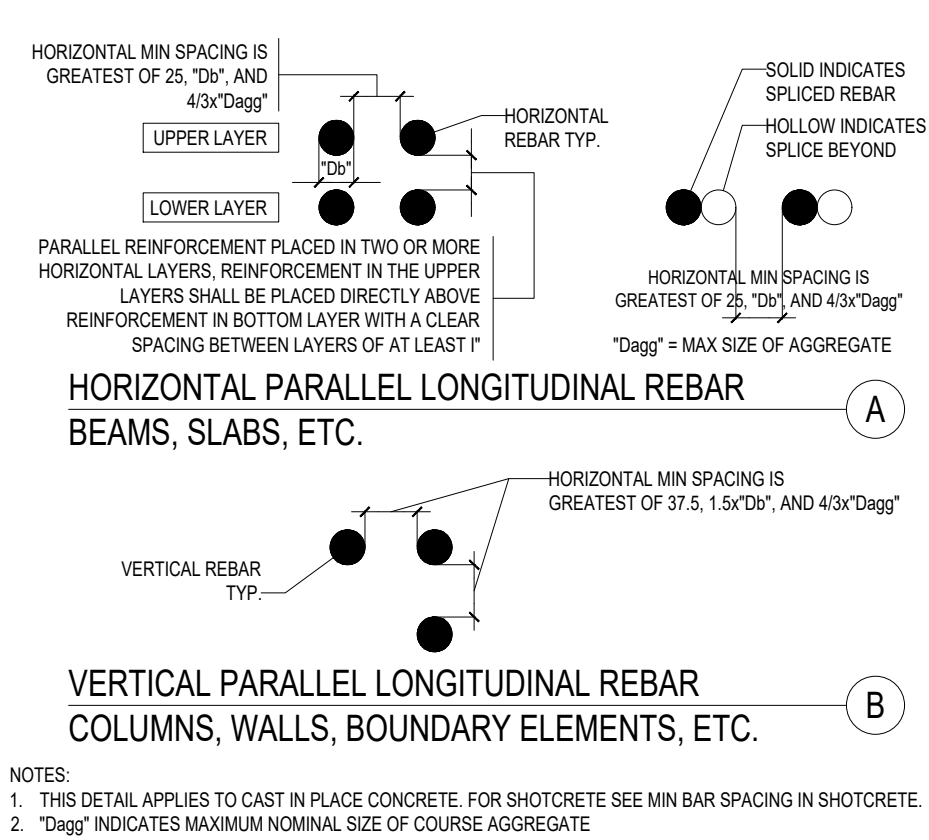


MIN BAR SPACING IN CIP CONC.

SCALE: N.T.S.

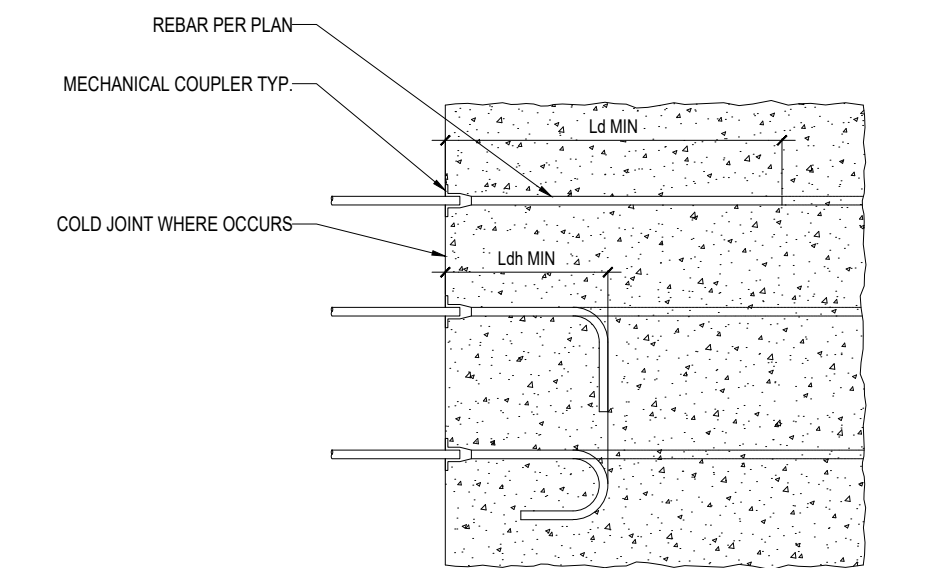


MECHANICAL COUPLER

SCALE: N.T.S.

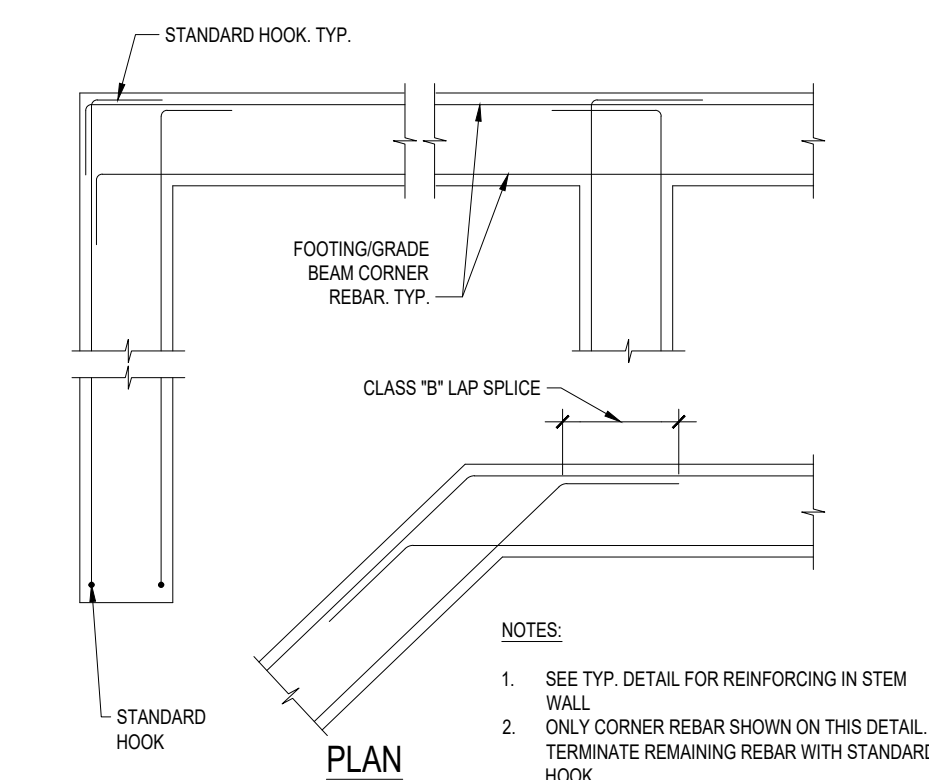


FTG & GB REINF. @ CONRNNERS

SCALE: N.T.S.

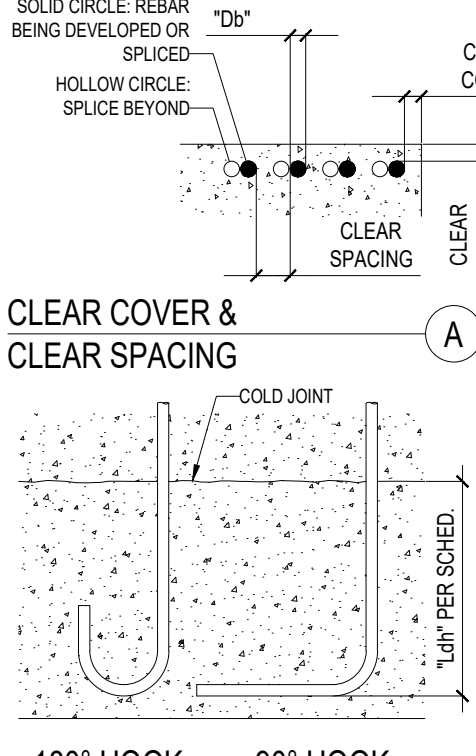

DEVELOPMENT OF STANDARD HOOK "Ldh"

SCALE: N.T.S.

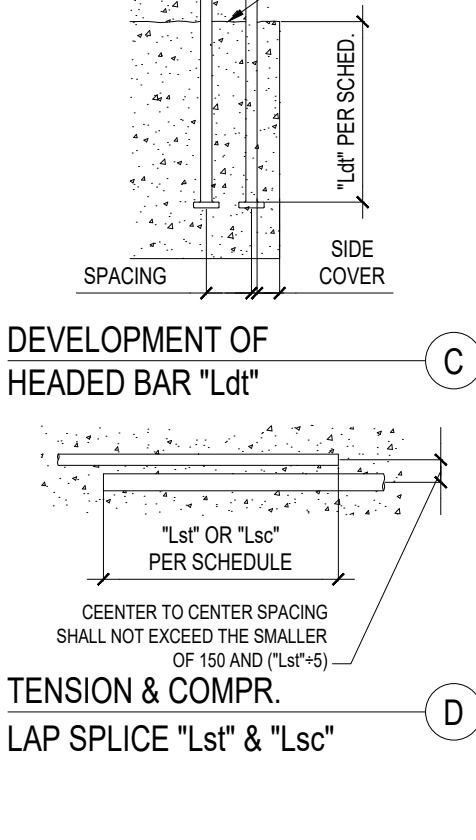

DEVELOPMENT AND SPLICE OF REBAR IN CONCRETE


SCALE: N.T.S.

TENSION DEVL LENGTH "Ld"		DEVL LENGTH "Ldh" STD HOOK		DEVL LENGTH "Ldt" HEADED BARS		COMPRESSION DEVL LENGTH "Ldc"	
f _c (MPa)		f _c (MPa)		f _c (MPa)		f _c (MPa)	
10	15	20	25	30	35	40	45
10	380	360	330	310	300	300	150
12	480	430	400	380	360	330	150
14	570	520	500	480	430	410	150
16	610	570	530	500	460	430	150
20	780	710	660	620	580	540	150
25	1470	1360	1270	1200	1140	1040	970
32	1890	1740	1630	1540	1430	1330	1230
40	NOT ALLOWED	890	870	860	820	780	670

- NOTES:
1. REBAR SHALL BE ALWAYS DEVELOPED ACROSS COLD JOINTS. SPLICES SHALL OCCUR ONLY WHERE SHOWN ON DETAILS, UNLESS OTHERWISE NOTED ELSEWHERE IN THE DRAWING SET. THE FOLLOWING SHALL APPLY:
 - A. MIN DEVELOPMENT LENGTH ACROSS A COLD JOINT OF STRAIGHT REBAR SHALL BE "Ld"
 - B. MIN DEVELOPMENT LENGTH ACROSS A COLD JOINT OF HOOKED REBAR SHALL BE "Ldh"
 - C. LAP SPLICE SHALL BE CLASS B TENSION LAP SPLICE "Lst"
 2. ALL THE DEVELOPMENT LENGTHS AND LAP SPLICES SHALL BE MODIFIED AS FOLLOWS:
 - A. CASTING POSITION: IF MORE THAN 300mm OF FRESH CONCRETE IS PLACED BELOW HORIZONTAL TOP REBAR, SCHEDULED VALUES OF "Ld" AND "Lst" SHALL BE MULTIPLIED BY 1.3.
 - B. LIGHT WEIGHT CONCRETE: IF LIGHT WEIGHT CONCRETE IS USED, ALL THE DEVELOPMENT LENGTHS AND TENSION LAP SPLICE SCHEDULED VALUES SHALL BE MULTIPLIED BY 1.3. HEADED BARS ARE NOT ALLOWED IN LIGHT WEIGHT CONCRETE. COMPRESSION LAP SPLICE "Ldc" DO NOT NEED TO BE INCREASED.
 - C. EPOXY COATING: SCHEDULED LENGTHS APPLY TO UNCOATED OR ZINC COATED (GALVANIZED) REBAR. IF EPOXY COATING IS SPECIFIED, SCHEDULED VALUED SHALL BE MULTIPLIED BY 1.2 FOR "Ldh", "Lst" AND BY 1.5 FOR "Ld", "Lst", "Ldc" AND "Lsc" DO NOT NEED TO BE INCREASED.
 - D. CONFINEMENT: SCHEDULED VALUES OF "Ld" AND "Lst" SHALL BE MULTIPLIED BY 1.5 FOR:
 - MEMBERS WITH TIES (SUCH AS COLUMNS, PILES, BEAMS, ETC.) WITH LONGITUDINAL REBAR WITH "CLEAR COVER" LESS THAN "Db" OR WITH "CLEAR SPACING" LESS THAN "Db"
 - MEMBERS WITHOUT TIES (SUCH AS WALLS, SLAB, FOOTINGS, ETC.) WITH LONGITUDINAL REBAR WITH "CLEAR SPACING" LESS THAN 2 x "Db"
 3. HEADED DEFORMED BARS SHALL BE PERMITTED IF ALL FOLLOWING CONDITIONS ARE MET (SEE INSET DETAIL):
 - A. PROVIDE CROSS HEADED DEFORMED BAR (RESEARCH REPORT ER 177) OR APPROVED EQUIVALENT
 - B. SIDE COVER IS AT LEAST 2xDb
 - C. REBAR SPACING IS AT LEAST 4xDb
 4. WHERE REBAR OF DIFFERENT SIZE ARE LAP SPICED, FOLLOWING SHALL APPLY:
 - A. LAP SPLICE SHALL BE THE GREATER OF L_{dc} OF LARGER BAR AND L_{dc} OF SMALLER BAR (TENSION)
 - B. LAP SPLICE SHALL BE THE GREATER OF L_{dc} OF LARGER BAR AND L_{dc} OF SMALLER BAR (COMPRESSION)
 - C. TENSION SHALL BE ASSUMED UNLESS NOTED OTHERWISE ELSEWHERE IN THIS SET
 5. FOR LAP OF BUNDLED REBAR CONTACT THE ENGINEER
 6. LAP SPLICE FOR 40mm BAR IS NOT ALLOWED. PROVIDE MECHANICAL OR WELDED SPLICES DEVELOPING 1.25F_y FOR THESE SPLICES. SUBMIT SELECTED SPLICE SYSTEM TO THE ENGINEER FOR APPROVAL


STEPPED GRADE BEAM

SCALE: N.T.S.

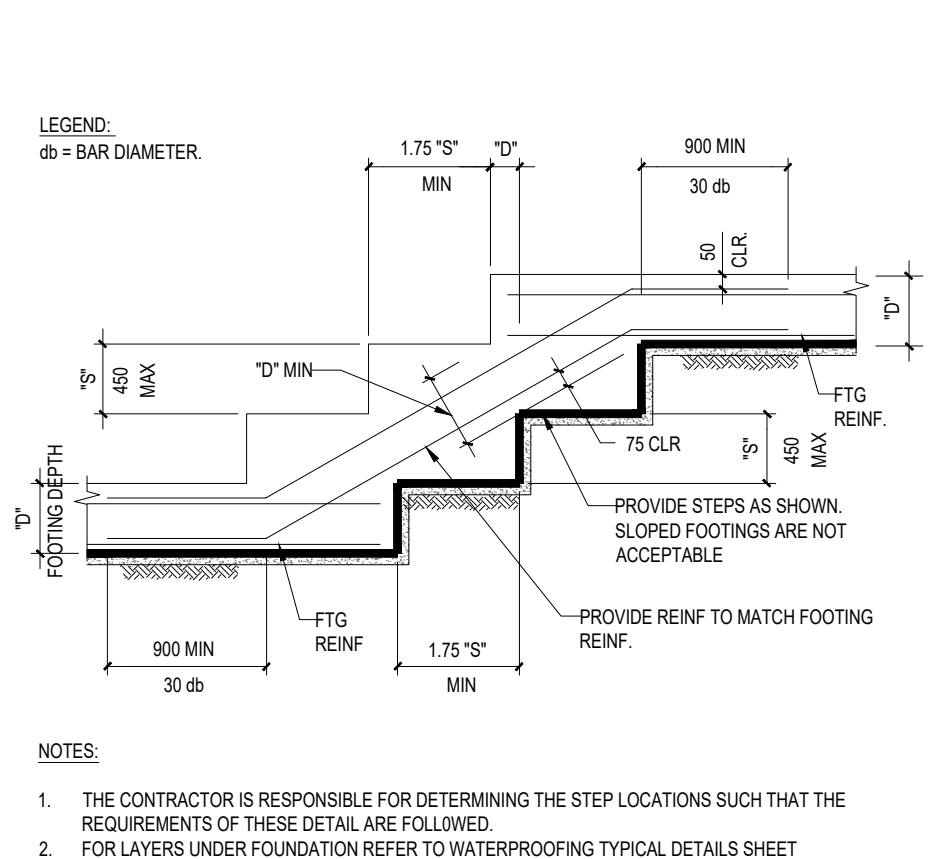


STEPPED FOOTING

SCALE: N.T.S.

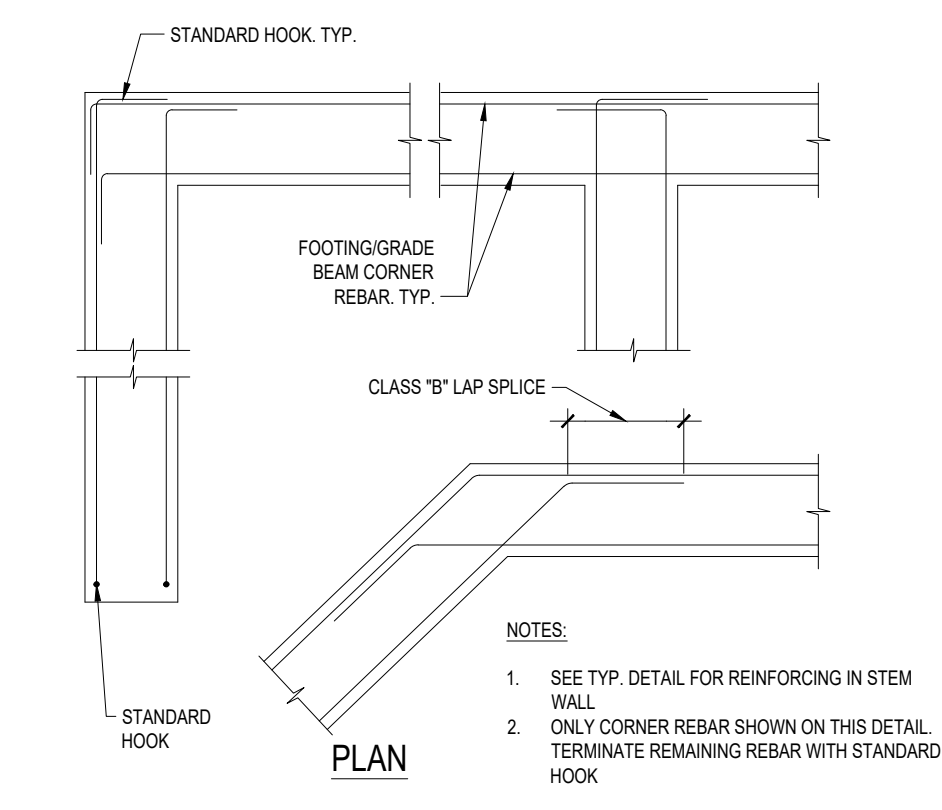


FTG & GB REINF. @ CONRNNERS

SCALE: N.T.S.

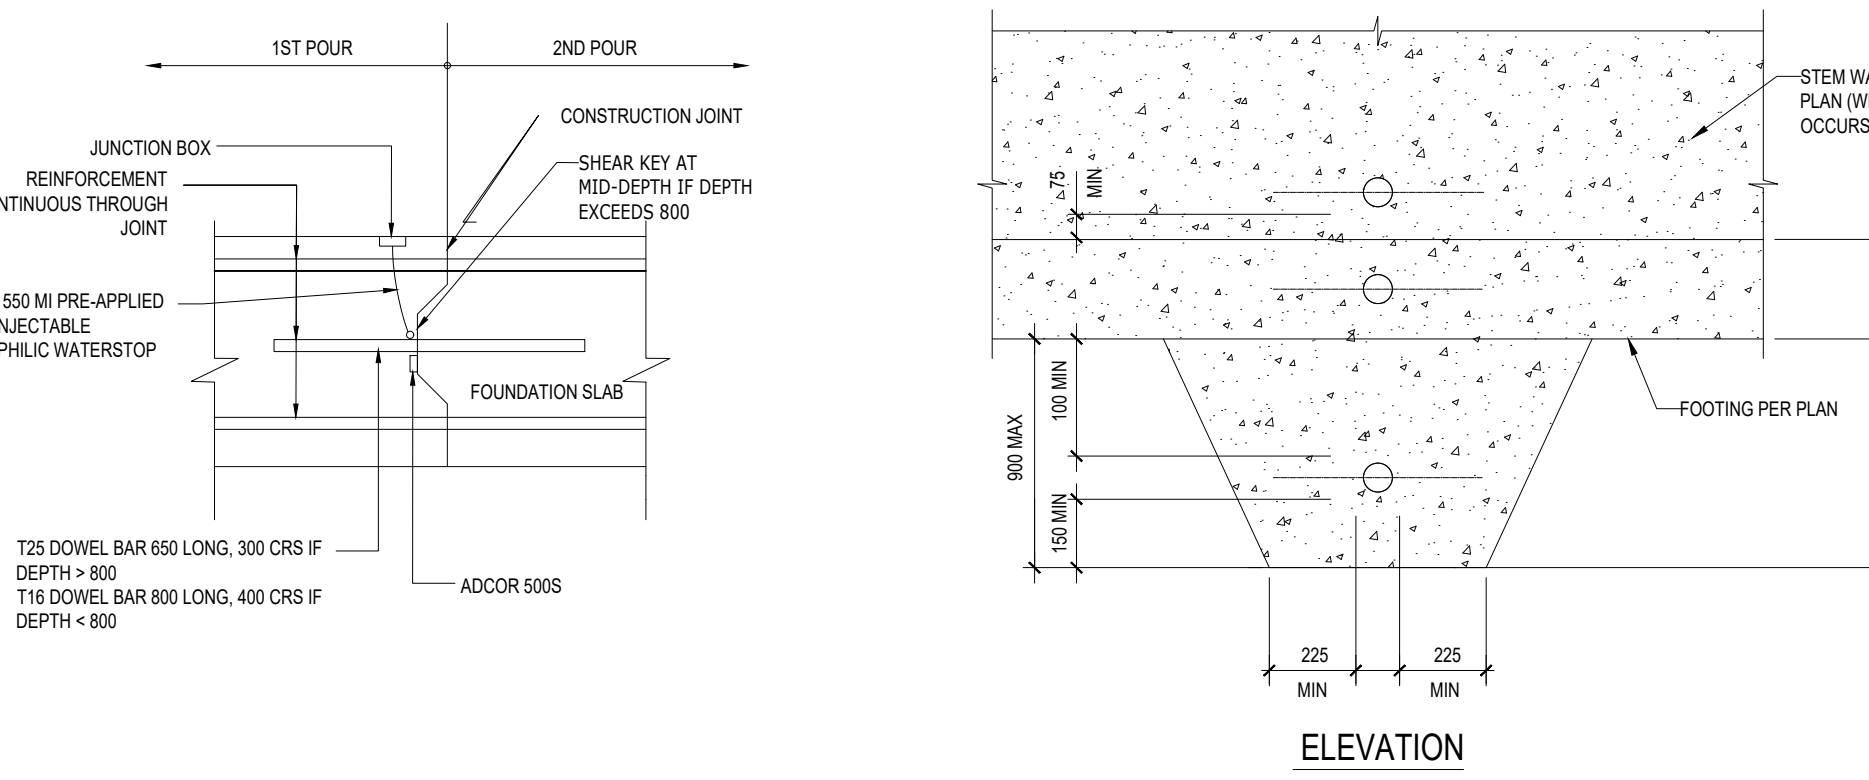

CONSTRUCTION JOINT AT FTG / RAFT FND


SCALE: N.T.S.

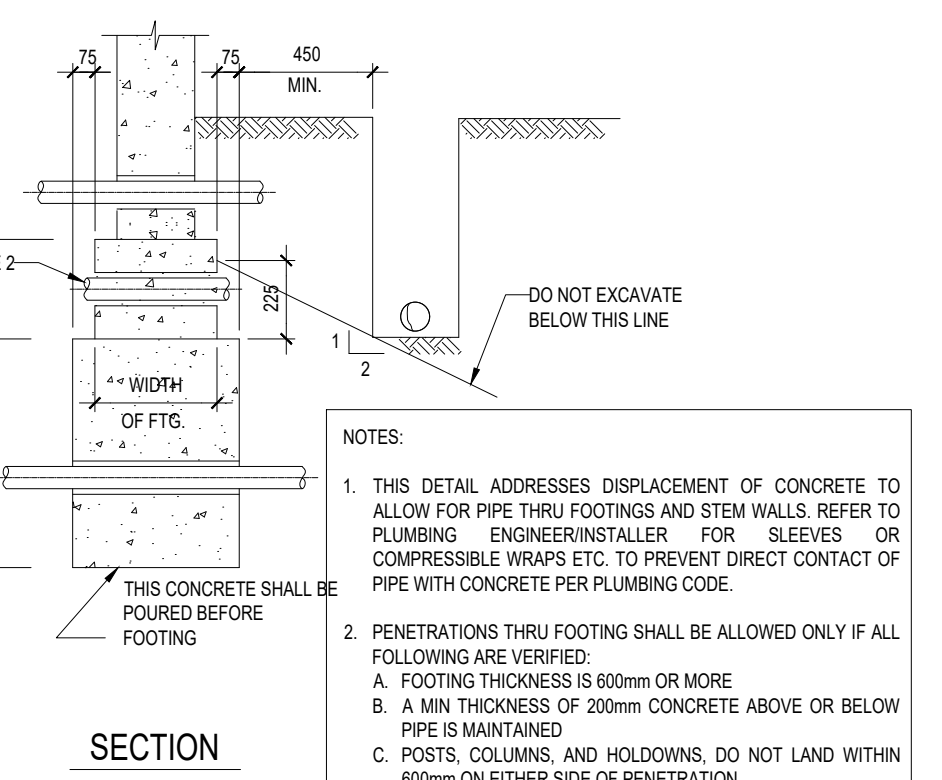

TYP. PIPE THROUGH FOUNDATION DETAIL

SCALE: N.T.S.

- GENERAL NOTES
1. This Drawing Issue has been checked and approved in accordance with the LOCI Quality Management System.
 2. All works shall be carried out in accordance with particular B general specifications, in conjunction with relevant conditions of contract.
 3. This drawing shall not be used directly for construction, but for preparation of Shop Drawings in coordination with other disciplines and Suppliers prior to manufacture, delivery and execution on site.
 4. All dimensions and levels are in millimeter, unless noted otherwise, only written dimensions to be followed and not scaled from the drawing.
 5. All dimensions to be verified at site and coordinated with other disciplines/ manufacturers in the preparation of shop drawings. Any changes shall be validated by the consultant.
 6. For elements with indicative design, the contractor / supplier shall submit complete construction details and technical specifications for approval prior to execution, shop drawings to particularly incorporate details at structural expansion joints as well as expansion / contraction joints needed for the respective materials/ finishes / related works.
 7. Safety standards and statutory regulations shall be adhered to in the manufacture, supply, storage and installation of all works.
 8. Any discrepancy or ambiguity whatsoever with dimensions / details / legends / specifications / etc, shall be brought to the attention of the Consultant and clarification obtained prior to finalization of tender / construction.

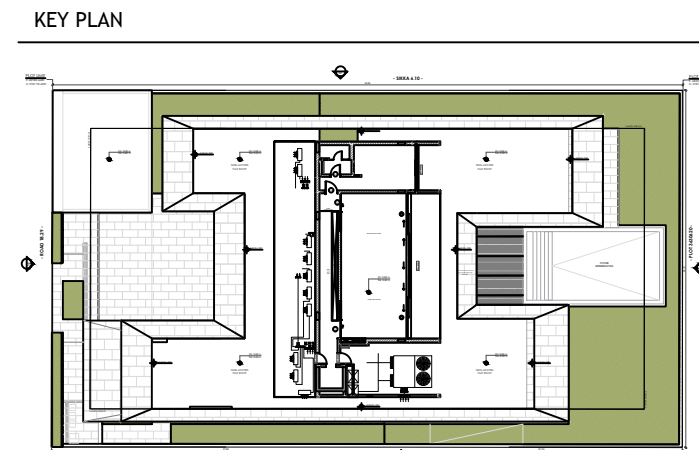

REV	DATE	DESCRIPTION	CHECKED	APPROVED
00	14.03.2025	ISSUED FOR APPROVAL	AN	BR

DRAWING REVISIONS

REV	DATE	DESCRIPTION	CHECKED	APPROVED
00	14.03.2025	ISSUED FOR APPROVAL	AN	BR

CLIENT
TARUN HARISH CHANDRA KHANNA

TYPICAL DETAILS - (SHEET 1 OF 10)

SHEET #
269-S-010

REVISION
R0

ISSUE DATE:
14-03-2025

SCALE @ A1
AS SHOWN

PROJECT DETAILS
KHANNA VILLA



PROJECT LOCATION
PLOT NO. 3630160
Al Manara,
Dubai

PROJECT NUMBER
269

PROJECT PHASE
DETAIL DESIGN

CONSULTANT

LOCI
لوکار

Office M31, KIA Flagship
Building
Sheikh Zayed Rd, Al Quoz 1
P. O. Box 72928, Dubai
T +971 4 357 6573
W www.loci.ae