
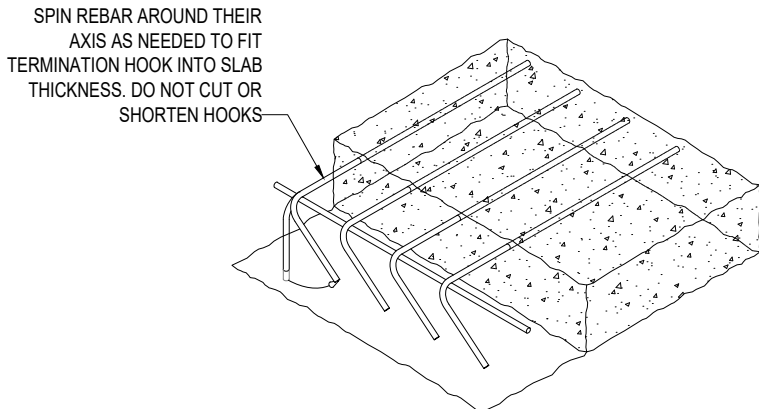


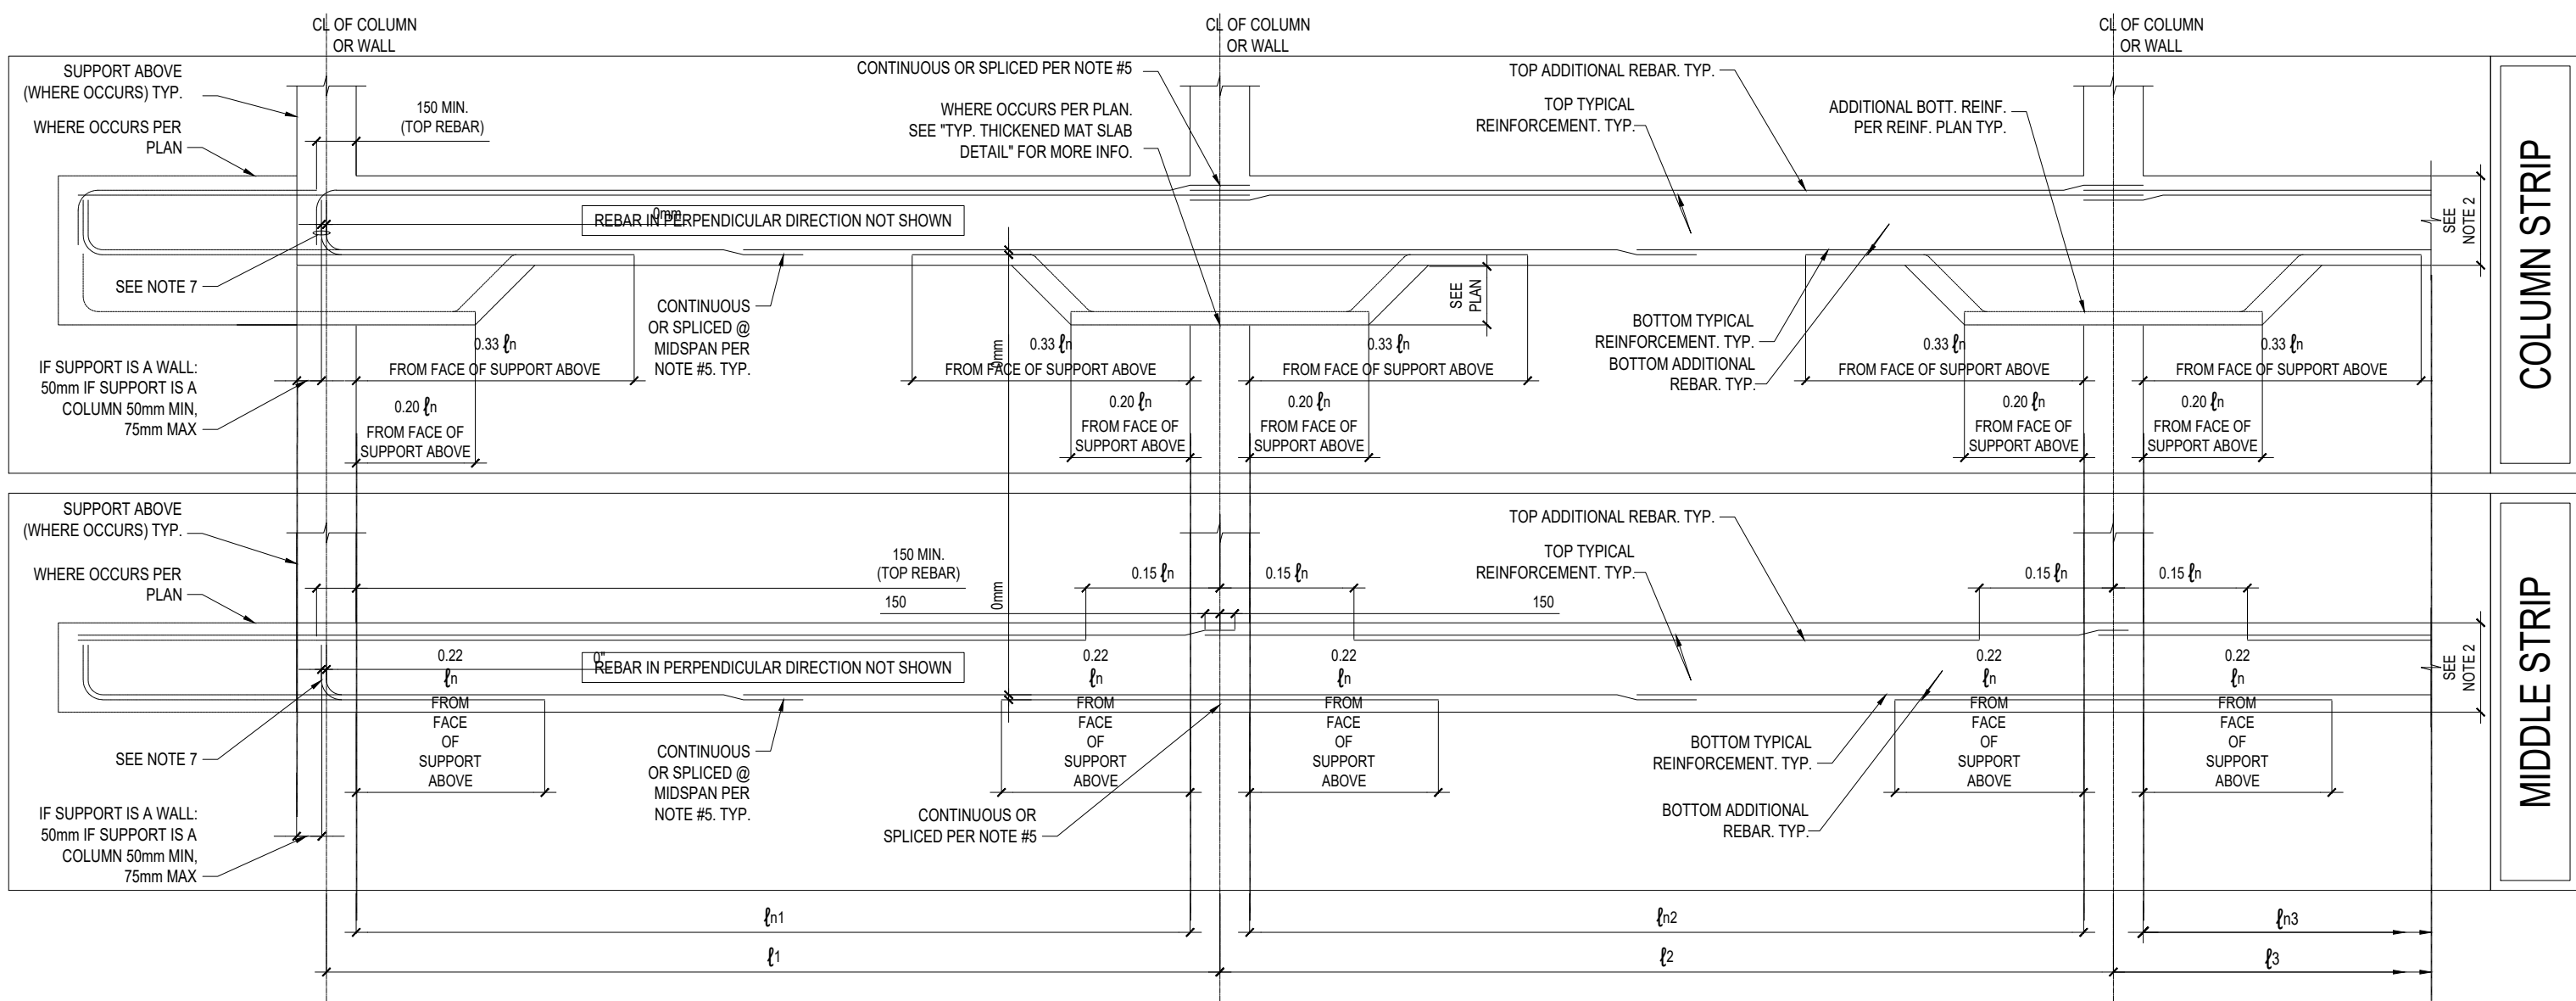

HOOK IN SHALLOW SLAB

SYMBOLS - DESIGN STRIPS

l_1 l_2 INDICATES CENTER TO CENTER SPANS (S.A.D.)

l_{n1} l_{n2} INDICATES CLEAR SPANS (S.A.D.)

l_n INDICATES THE GREATER OF ADJACENT CLEAR SPANS

REBAR ARRANGEMENT ALONG DESIGN STRIPS - FOR DISTRIBUTION OF REBAR ACROSS DESIGN STRIP REFER TO NOTE 9 AND 10

SLAB REINFORCING ARRANGEMENT NOTES:




- SCOPE: THIS DETAIL ADDRESSES THE EXTENT, DISTRIBUTION, AND DETAILING OF REBAR IN TWO WAY CONCRETE RAFT FOUNDATION IN EACH DIRECTION
- FOR THICKNESS SEE PLAN
- REBAR SIZE, QUANTITY, AND LOCATION IS AS SPECIFIED ON THE STRUCTURAL PLANS. REBAR INCLUDE TOP AND BOTTOM "TYPICAL REINFORCEMENT" AND TOP AND BOTTOM "ADDITIONAL REBAR" (OR "ADD REBAR" OR "ADDITIONAL REINFORCEMENT")
- DESIGN STRIPS: FOR EACH DIRECTION, REBAR SHALL BE ARRANGED WITHIN DESIGN STRIPS. THE WIDTH AND LOCATION OF "COLUMN STRIPS" AND "MIDDLE STRIPS" ARE SPECIFIED ON THE STRUCTURAL PLANS. IF STRIPS ARE NOT SPECIFIED, PROVIDE DETAILING PER "COLUMN STRIP"

- SPLICE
 - FULL SPAN REBAR SHALL EITHER BE:
 - CONTINUOUS OVER MULTIPLE SPANS, OR
 - SPLICED (AS NEEDED FOR ERECTION/TRANSPORTATION PURPOSES) ONLY AT LOCATIONS SHOWN ON THESE DETAILS. ALL SPLICES SHALL BE CLASS "B" LAP SPLICE, EXCEPT THAT A 150mm/150mm SPLICE CAN BE PROVIDED FOR TOP REBAR AT MIDDLE STRIPS INTERIOR CONDITIONS (SEE DETAILS)
 - PARTIAL SPAN REBAR (E.G. $0.33 l_n$, $0.22 l_n$, ETC.) SHALL NOT BE SPLICED
- ALL REBAR SHALL BE CHAIRED UP
- HOOKS:
 - PROVIDE STANDARD HOOKS AT ALL BOTTOM REBAR EXTERIOR SUPPORTS
 - AT EACH COLUMN STRIP, PROVIDE STANDARD HOOKS AT TOP TYPICAL REINFORCEMENT ENDS AT EXTERIOR SUPPORTS
 - AT SLAB EDGES, IF HOOKS EXCEED THE SLAB THICKNESS, HOOKS MAY BE SLIGHTLY SPUN AROUND THE REBAR AXIS AS NEEDED TO FIT THE HOOK WITHIN THE SLAB THICKNESS. DO NOT CUT THE LEG OF THE HOOK. SEE INSET DETAIL 'B'
 - AT CONTRACTOR'S OPTION & S.E.O.'s APPROVAL, AND AT NO ADDITIONAL COST TO CLIENT, HEADED REBAR MAY BE PROVIDED IN LIEU OF STANDARD HOOKS AT SLAB EDGES TO RELIEVE REBAR CONGESTION.

- DISTRIBUTION OF TYPICAL REINFORCEMENT ACROSS ENTIRE SLAB: TYPICAL REINFORCEMENT SHALL BE ARRANGED WITH UNIFORM SPACING CALLED OUT ON PLANS FOR EACH DIRECTION, TOP AND BOTTOM, ACROSS THE ENTIRE SLAB.
- DISTRIBUTION OF ADDITIONAL REBAR ACROSS DESIGN STRIPS: ADD REBAR SHALL BE DISTRIBUTED/SPREAD ACROSS THE ENTIRE STRIP WIDTH AS SPECIFIED BELOW. DO NOT BUNDLE ADD REBAR IN ANY CASE.
 - AT MIDDLE STRIP TOP AND BOTTOM POSITION, AND COLUMN STRIP TOP POSITION, ADD REBAR SHALL BE DISTRIBUTED WITH UNIFORM SPACING ACROSS THE STRIP WIDTH.
 - AT COLUMN STRIP BOTTOM POSITION, IF ONLY THREE OR FEWER ADD REBAR ARE SPECIFIED, PLACE SUCH REBAR IN CORRESPONDENCE TO THE CONCRETE COLUMN BELOW. OTHERWISE, 75% OF ADD REBAR SHALL BE DISTRIBUTED WITH UNIFORM SPACING ACROSS A 1800mm WIDE "BAND" EXTENDING 900mm ON EACH SIDE OF THE CENTER LINE OF THE COLUMN, AND THE REMAINDER SHALL BE DISTRIBUTED EVENLY ACROSS THE REST OF THE STRIP.
 - EACH ADD REBAR LOCATION SHALL BE ADJUSTED AS NEEDED TO MAINTAIN ADEQUATE CLEAR SPACING FROM OTHER REBAR, INCLUDING TYPICAL REINFORCEMENT.

TWO-WAY RAFT FOUNDATION REINFORCEMENT ARRANGEMENT

SCALE: N.T.S.

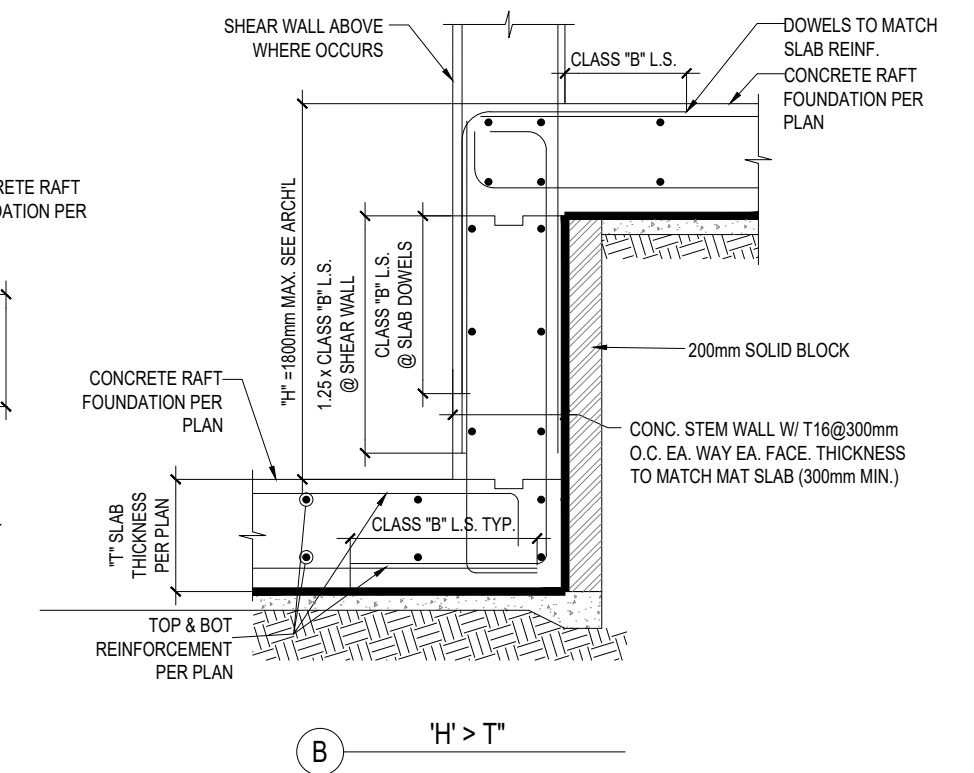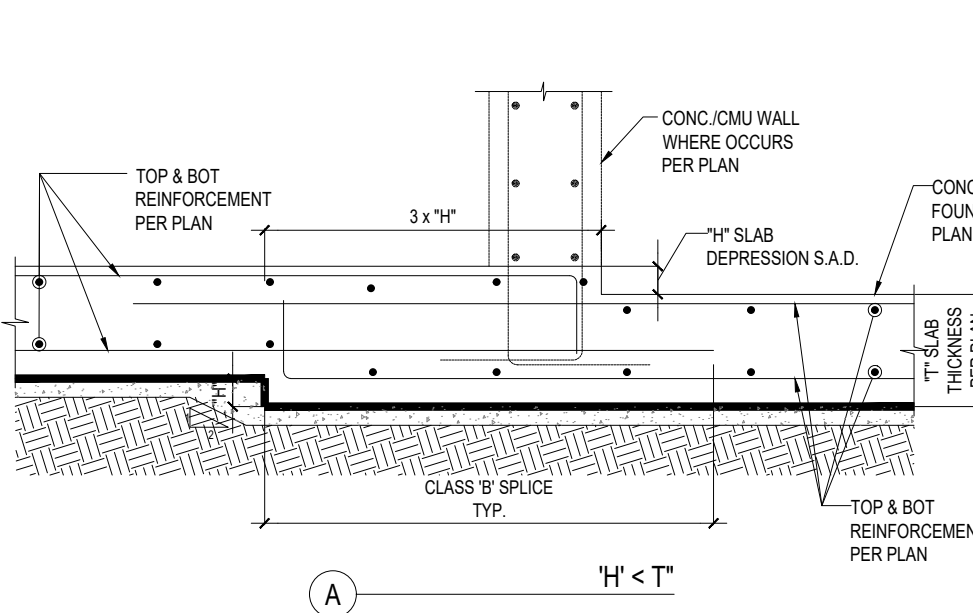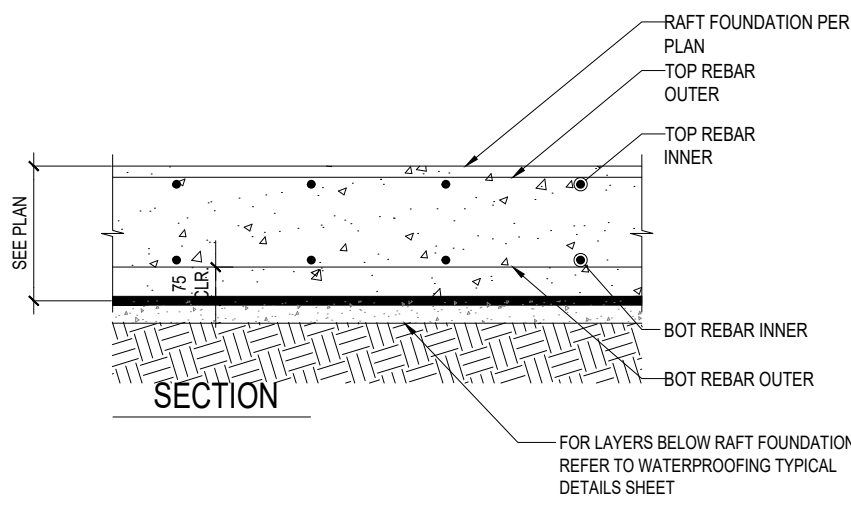


NOTES:

- FOR NUMBER OF REBAR AND REBAR SIZE AND SPACING SEE PLANS
- FOR DEFINITION OF INNER OR OUTER REBAR SEE PLANS. IF DEFINITION IS NOT AVAILABLE, ARRANGE THE OUTER REBAR IN THE LONGEST SPAN

RAFT FOUNDATION REBAR ARRANGEMENT



SCALE: N.T.S.

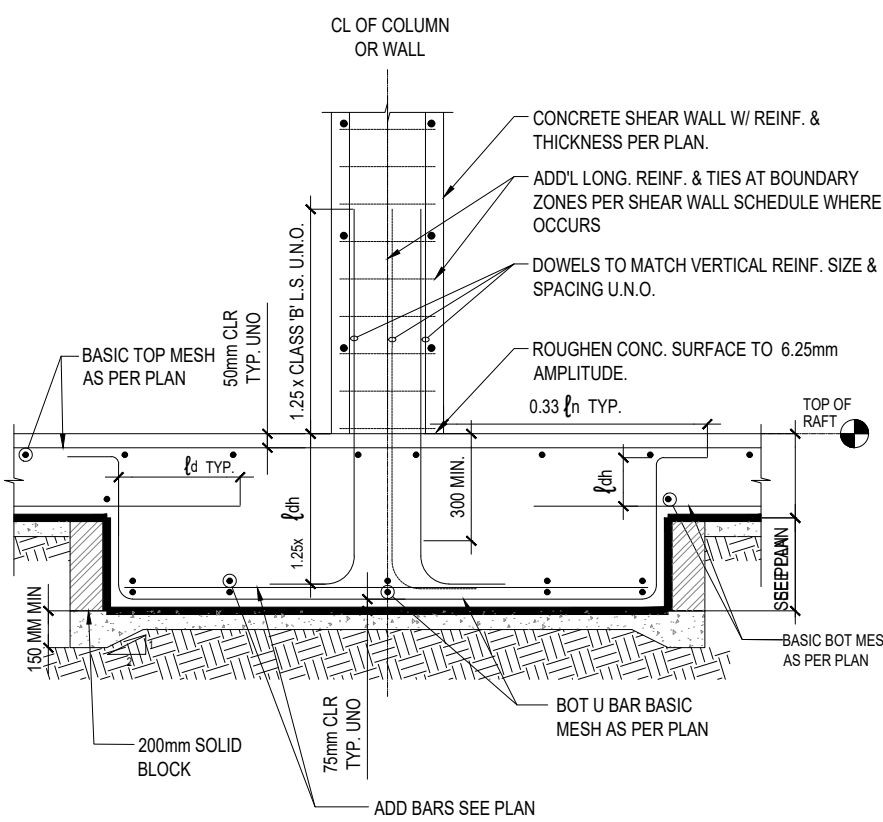

TYP. RAFT FOUNDATION DEPRESSION DETAIL

SCALE: N.T.S.

SCALE: N.T.S.

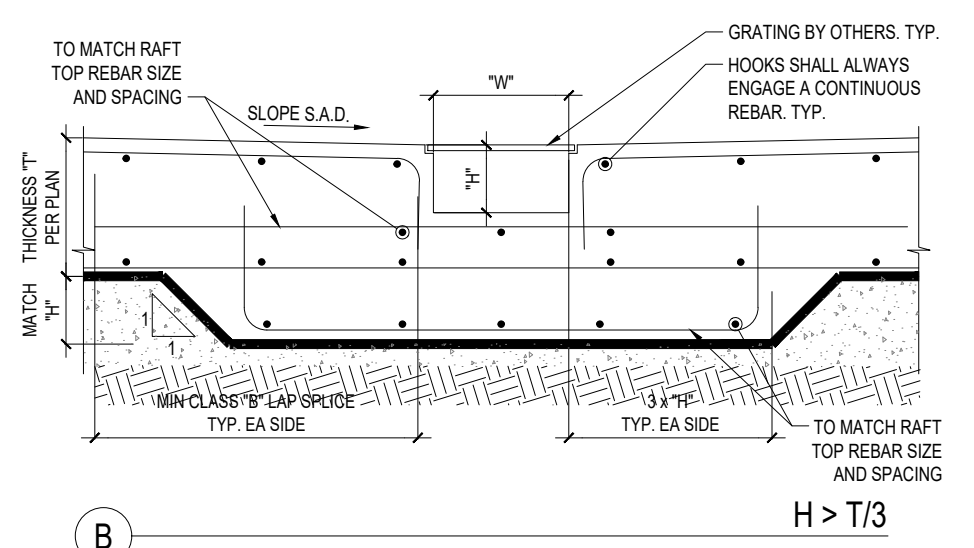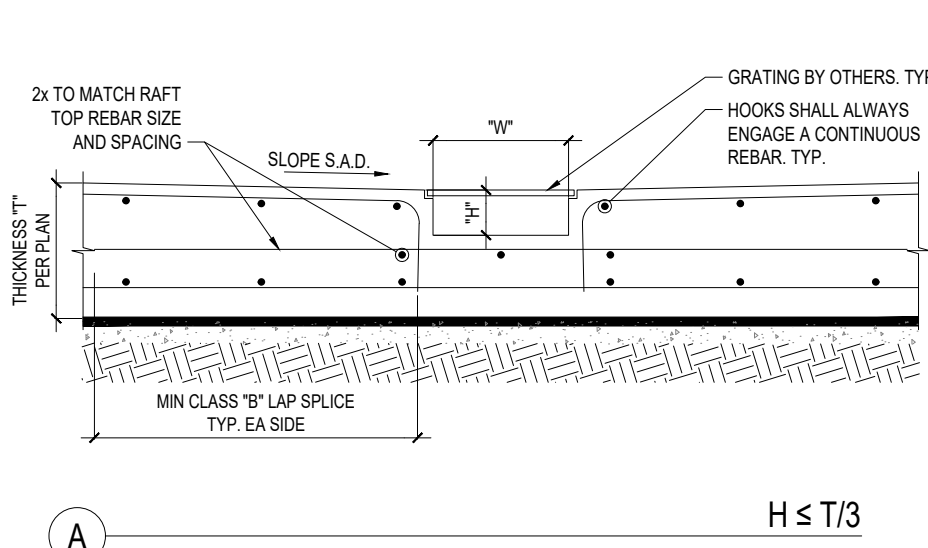


NOTES:

- FOR LOCATION OF TRENCH DRAIN IN RAFT REFER TO ARCHITECT/MEP
- FOR RAFT THICKNESS AND REINFORCEMENT SEE PLANS
- FOR TRENCH DRAIN DIMENSIONS "W" AND "H" REFER TO ARCH/MEP DRAWINGS AND THE FOLLOWING LIMITATIONS:
 - "W" MAX 400mm
 - "H" MAX 300mm
- FOR INNER AND OUTER REBAR LAYER ARRANGEMENT SEE PLANS. ARRANGEMENT SHOWN ON THIS DETAIL IS FOR REFERENCE ONLY

NOTES:

- THIS DETAIL ADDRESSES THE ARRANGEMENT OF CONDUITS WITHIN THE RAFT THICKNESS
- SLEEVES OR COMPRESSIBLE MATERIAL AROUND THE CONDUITS FOR MEP CODE COMPLIANCE SHALL BE SPECIFIED BY OTHERS. CONTRACTOR SHALL CONFIRM WITH MEP SUBCONTRACTORS OR MEP ENGINEER SUCH REQUIREMENT PRIOR TO PLACING THE CONDUITS WITHIN THE CONCRETE SLAB
- CONDUIT SHALL BE SUPPORTED BY ADDITIONAL REBAR AND CHAIRS IN THE SLAB
- CONDUIT SHALL STAY 600mm CLEAR FROM COLUMN FACES, CROSS TEIS & SHEAR WALLS.

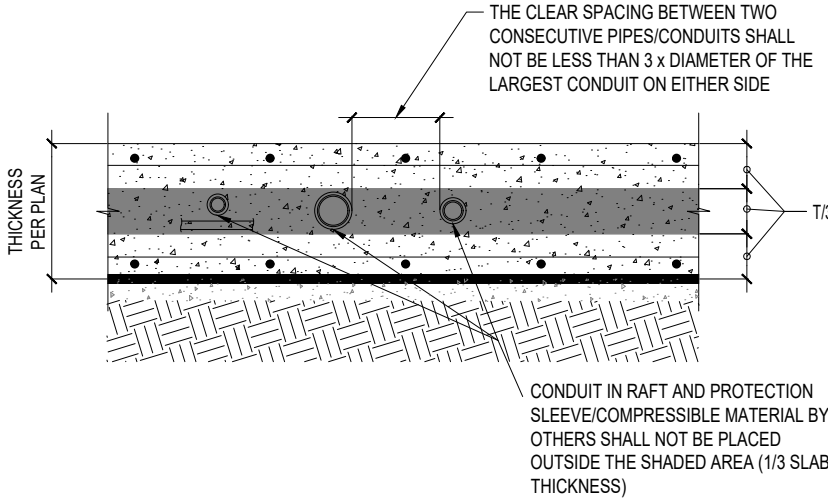

CONDUIT IN RAFT FOUNDATION

SCALE: N.T.S.

TYP. SHEAR WALL/COLUMN AT RAFT FND.

SCALE: N.T.S.


TRENCH DRAIN IN RAFT FOUNDATION

SCALE: N.T.S.

GENERAL NOTES

- This Drawing Issue has been checked and approved in accordance with the LOCI Quality Management System.
- All works shall be carried out in accordance with particular & general specifications, in conjunction with relevant conditions of contract.
- This drawing shall not be used directly for Construction, but for preparation of Shop Drawings in coordination with other disciplines and Suppliers prior to manufacture, delivery and execution on site.
- All dimensions and levels are in millimeter, unless noted otherwise, only written dimensions to be followed and not scaled from the drawing.
- All dimensions to be verified at site and coordinated with other disciplines/ manufacturers in the preparation of shop drawings. Any changes shall be validated by the consultant.
- For elements with indicative design, the contractor / supplier shall submit complete construction details and technical specifications for approval prior to execution. Shop drawings to particularly incorporate details at structural expansion joints as well as expansion / contraction joints needed for the respective materials/ finishes / related works.
- Safety standards and statutory regulations shall be adhered to in the manufacture, supply, storage and installation of all works.
- Any discrepancy or ambiguity whatsoever with dimensions / details / legends / specifications / etc, shall be brought to the attention of the Consultant and clarification obtained prior to finalization of tender / construction.

KEY PLAN

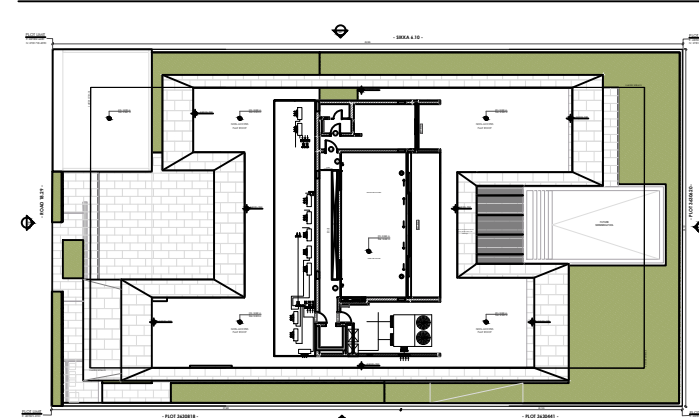

DRAWING REVISIONS

REV	DATE	DESCRIPTION	CHECKED	APPROVED
00	14.03.2025	ISSUED FOR APPROVAL	AN	BR

CLIENT

TARUN HARISH CHANDRA KHANNA

DRAWING DETAILS

TYPICAL DETAILS - (SHEET 3 OF 10)

SHEET #

269-S-012

REVISION

R0

ISSUE DATE:

14-03-2025

SCALE @ A1

AS SHOWN

PROJECT DETAILS

KHANNA VILLA



PROJECT LOCATION
PLOT NO. 3630160
Al Manara,
Dubai

PROJECT NUMBER

269

PROJECT PHASE

DETAIL DESIGN

CONSULTANT

LOCI
لوکار

Office M31, KIA Flagship
Building
Sheikh Zayed Rd, Al Quoz 1
P. O. Box 72928, Dubai
T +971 4 357 6573
W www.loci.ae