



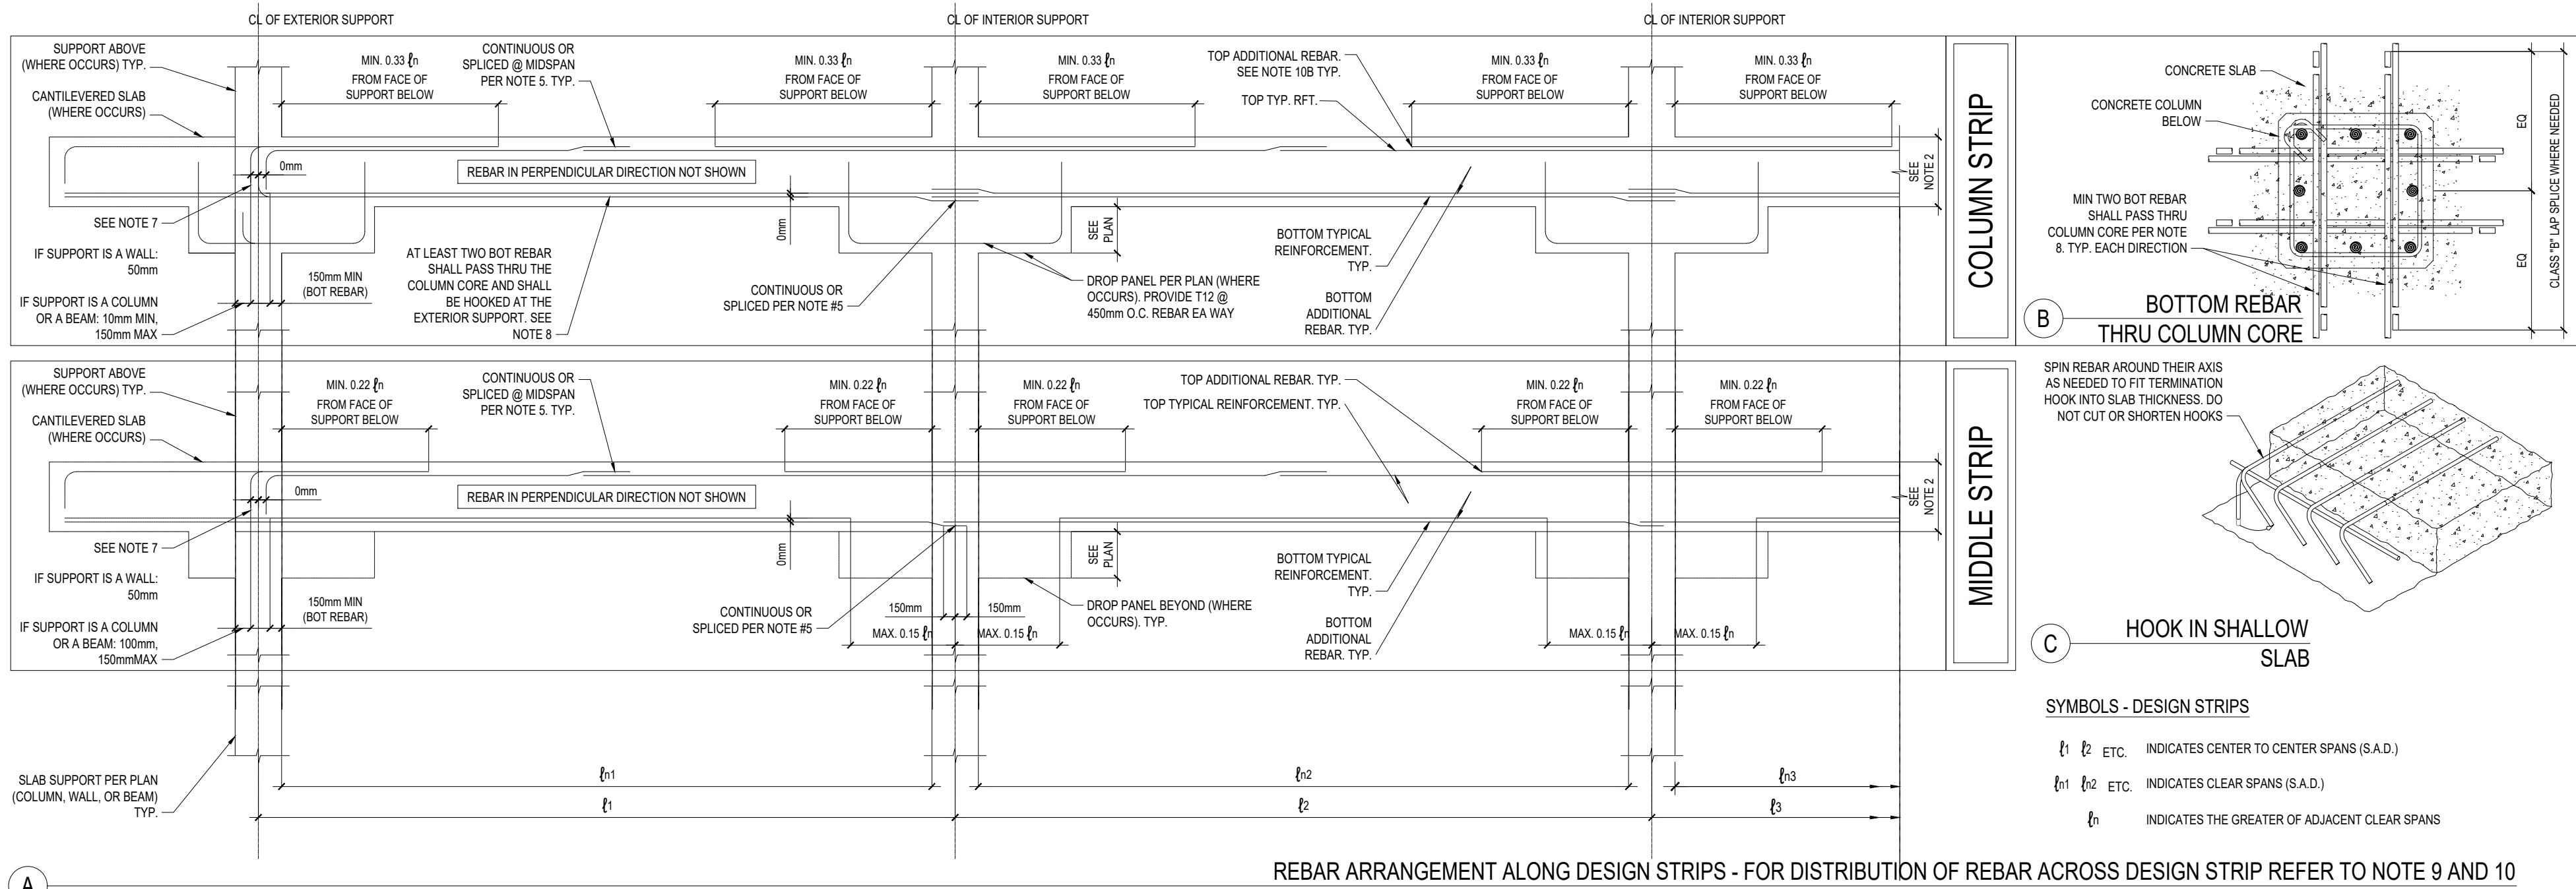


- REBAR ARRANGEMENT ALONG DESIGN STRIPS - FOR DISTRIBUTION OF REBAR ACROSS DESIGN STRIP REFER TO NOTE 9 AND 10**
- SLAB REINFORCING ARRANGEMENT NOTES:**
- SCOPE: THIS DETAIL ADDRESSES THE EXTENT, DISTRIBUTION, AND DETAILING OF REBAR IN TWO WAY CONCRETE SLAB IN EACH DIRECTION
 - FOR SLAB THICKNESS SEE PLAN
 - REBAR SIZE, QUANTITY, AND LOCATION IS AS SPECIFIED ON THE STRUCTURAL PLANS. REBAR INCLUDE TOP AND BOTTOM "TYPICAL REINFORCEMENT" AND TOP AND BOTTOM "ADDITIONAL REBAR" (OR "ADD REBAR" OR "ADDITIONAL REINFORCEMENT")
 - DESIGN STRIPS: FOR EACH DIRECTION, REBAR SHALL BE ARRANGED WITHIN DESIGN STRIPS. THE WIDTH AND LOCATION OF "COLUMN STRIPS" AND "MIDDLE STRIPS" ARE SPECIFIED ON THE STRUCTURAL PLANS. IF STRIPS ARE NOT SPECIFIED, PROVIDE DETAILING PER "COLUMN STRIP"
 - SPlice:
 - FULL SPAN REBAR SHALL EITHER BE:
 - CONTINUOUS OVER MULTIPLE SPANS, OR
 - SPliced (AS NEEDED FOR ERECTION/TRANSPORTATION PURPOSES) ONLY AT LOCATIONS SHOWN ON THESE DETAILS. ALL SPlicERS SHALL BE CLASS "B" LAP SPlice, EXCEPT THAT A 6"x6" SPlice CAN BE PROVIDED FOR BOTTOM REBAR AT MIDDLE STRIPS INTERIOR CONDITIONS (SEE DETAILS)
 - PARTIAL SPAN REBAR (E.G. 0.33 l_n , 0.22 l_n , ETC.) SHALL NOT BE SPliced
 - ALL REBAR SHALL BE CHAired UP
 - HOOKS:
 - PROVIDE STANDARD HOOKS AT ALL TOP REBAR EXTERIOR SUPPORTS
 - AT EACH COLUMN STRIP, PROVIDE STANDARD HOOKS AT BOTTOM TYPICAL REINFORCEMENT ENDS AT EXTERIOR SUPPORTS
 - AT SLAB EDGES, IF HOOKS EXCEED THE SLAB THICKNESS, HOOKS MAY BE SLIGHTLY SPUN AROUND THE REBAR AXIS AS NEEDED TO FIT THE HOOK WITHIN THE SLAB THICKNESS. DO NOT CUT THE LEG OF THE HOOK.
 - AT EACH COLUMN STRIP, PROVIDE A MIN OF 2 BOTTOM REBAR IN EACH DIRECTION PASSING THRU THE COLUMN CORE (I.E. THRU THE COLUMN LONGITUDINAL REBAR). SEE INSET DETAIL "B". THESE REBAR SHALL HAVE HOOKED ENDS AT THE EXTERIOR SUPPORTS.
 - DISTRIBUTION OF TYPICAL REINFORCEMENT ACROSS ENTIRE SLAB: TYPICAL REINFORCEMENT SHALL BE ARRANGED WITH UNIFORM SPACING CALLED OUT ON PLANS FOR EACH DIRECTION, TOP AND BOTTOM, ACROSS THE ENTIRE SLAB.
 - DISTRIBUTION OF ADDITIONAL REBAR ACROSS DESIGN STRIPS: ADD REBAR SHALL BE DISTRIBUTED/SPREAD ACROSS THE ENTIRE STRIP WIDTH AS SPECIFIED BELOW. DO NOT BUNDLE ADD REBAR IN ANY CASE.
 - AT MIDDLE STRIP TOP AND BOTTOM POSITION, AND COLUMN STRIP BOTTOM POSITION, ADD REBAR SHALL BE DISTRIBUTED WITH UNIFORM SPACING ACROSS THE STRIP WIDTH.
 - AT COLUMN STRIP TOP POSITION, 75% OF ADDED REBAR SHALL BE UNIFORMLY DISTRIBUTED ACROSS A 1800mm WIDE "BAND" CENTERED ON THE COLUMN CENTER LINE. THE REMAINING 25% SHALL BE EVENLY DISTRIBUTED WITHIN THE REMAINDER OF THE COLUMN STRIP OUTSIDE THE 1800mm WIDE "BAND". IF THREE OR LESS ADD TOP REBARS ARE SPECIFIED, EVENLY PLACE WITHIN THE WIDTH OF THE COLUMN.
 - EACH ADD REBAR LOCATION SHALL BE ADJUSTED AS NEEDED TO MAINTAIN ADEQUATE CLEAR SPACING FROM OTHER REBAR, INCLUDING TYPICAL REINFORCEMENT.
 - THE EXTEND OF ADD BARS SHOWN ON THIS DETAIL IS THE MINIMUM CODE REQUIREMENT IN CASE OF BAR LENGTHS SHOWN ON THE PLANS HAS LONGER LENGTH THE PLANS BAR LENGTH SHOULD BE USED OTHERWISE THE EXTENSION SHOWN ON THIS DETAIL SHOULD BE FOLLOWED.

TWO-WAY SLAB REINFORCING ARRANGEMENT

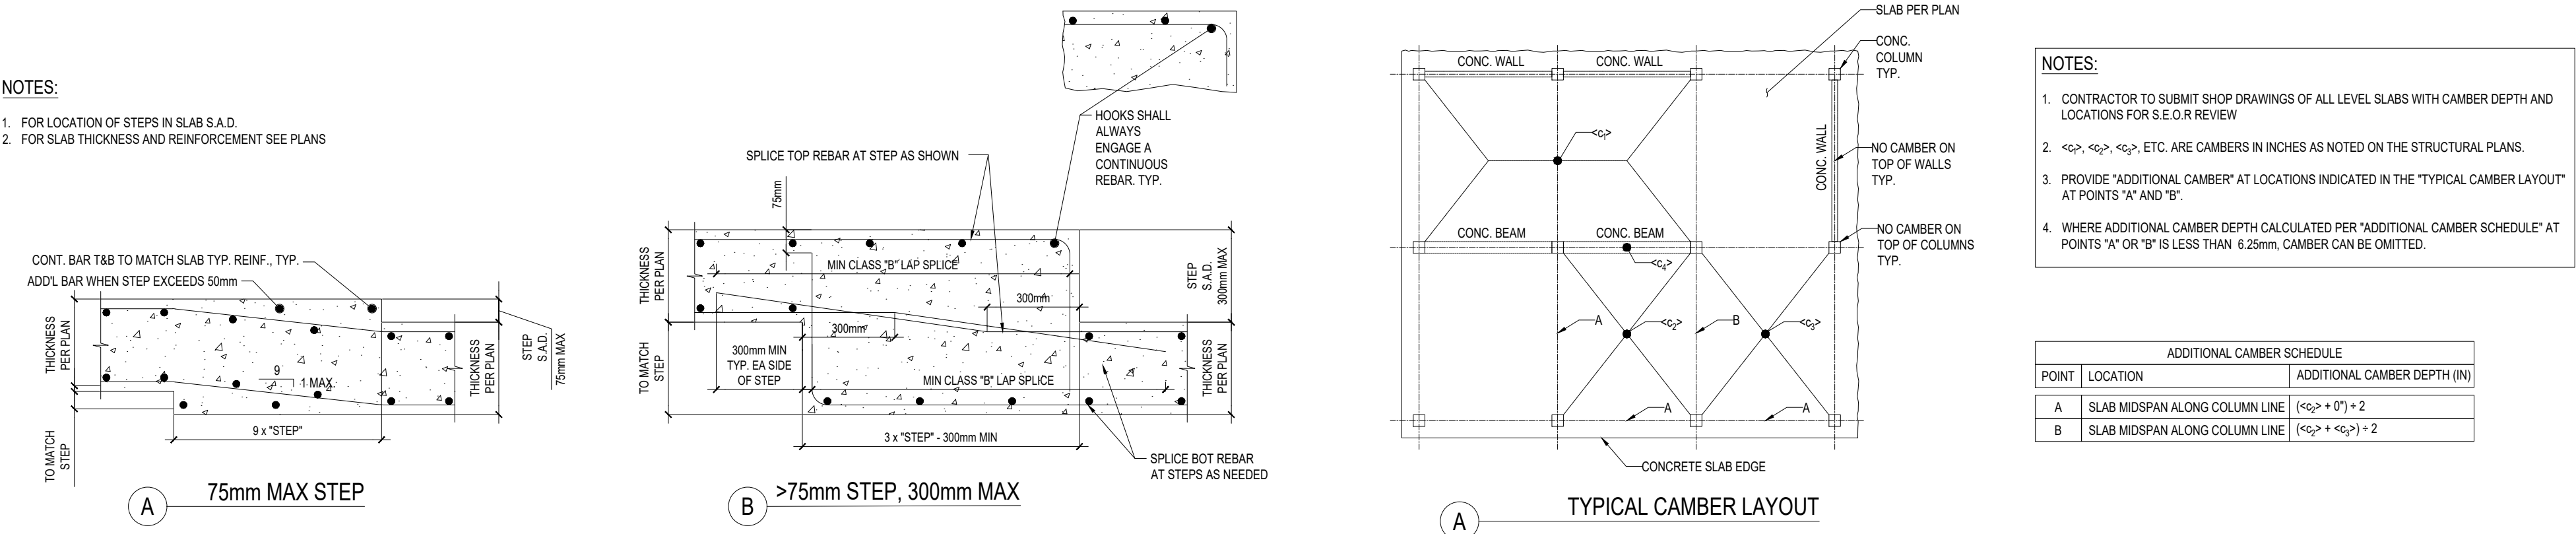


TYP. TWO-WAY CONCRETE SLAB CAMBER SCHEDULE

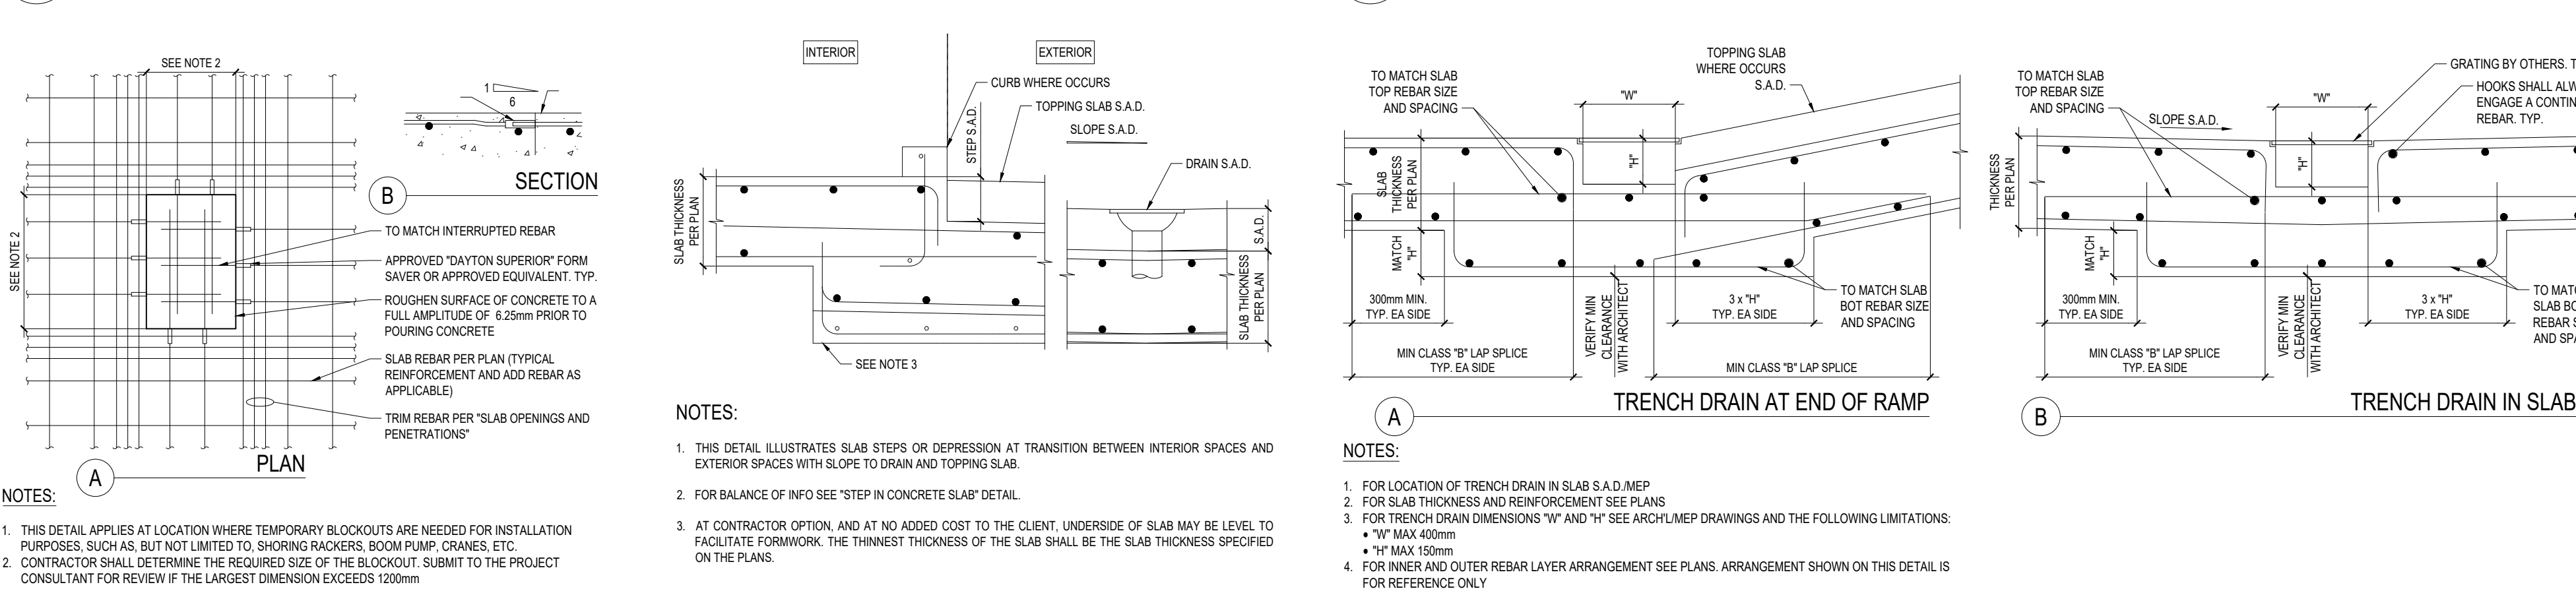


TYP. BUILT UP SLAB

ADDITIONAL CAMBER SCHEDULE

POINT	LOCATION	ADDITIONAL CAMBER DEPTH (IN)
A	SLAB MIDSPAN ALONG COLUMN LINE	$(c_{c2} + 0') + 2$
B	SLAB MIDSPAN ALONG COLUMN LINE	$(c_{c2} + c_{c3}) + 2$

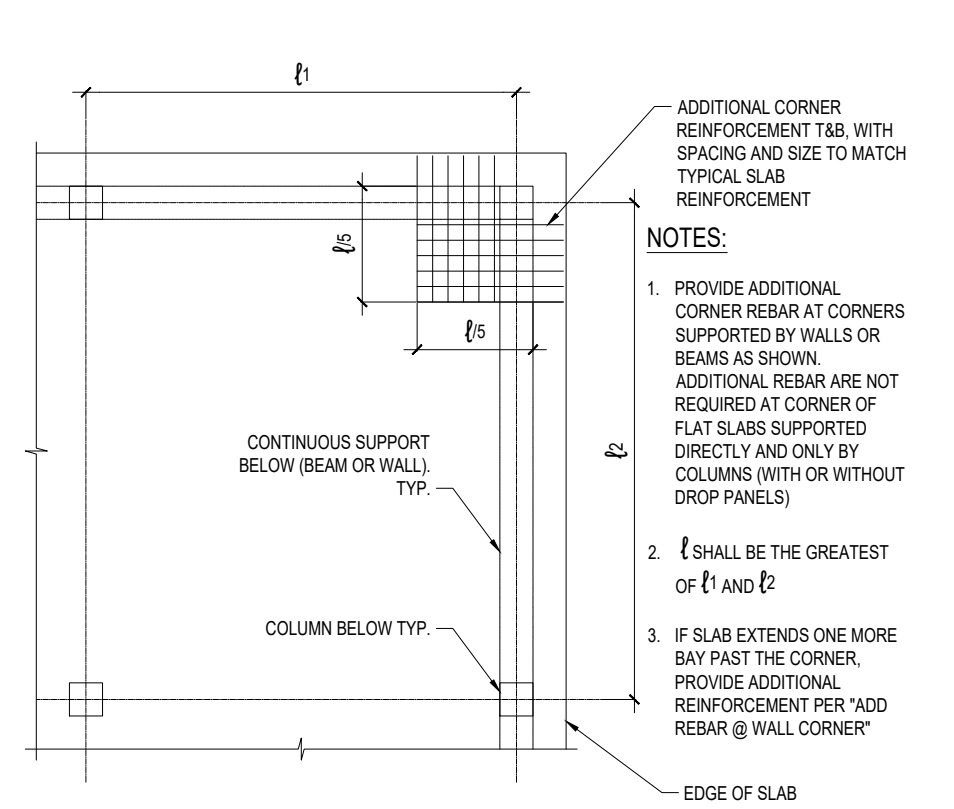


ADD REBAR AT SUPPORTED CORNER

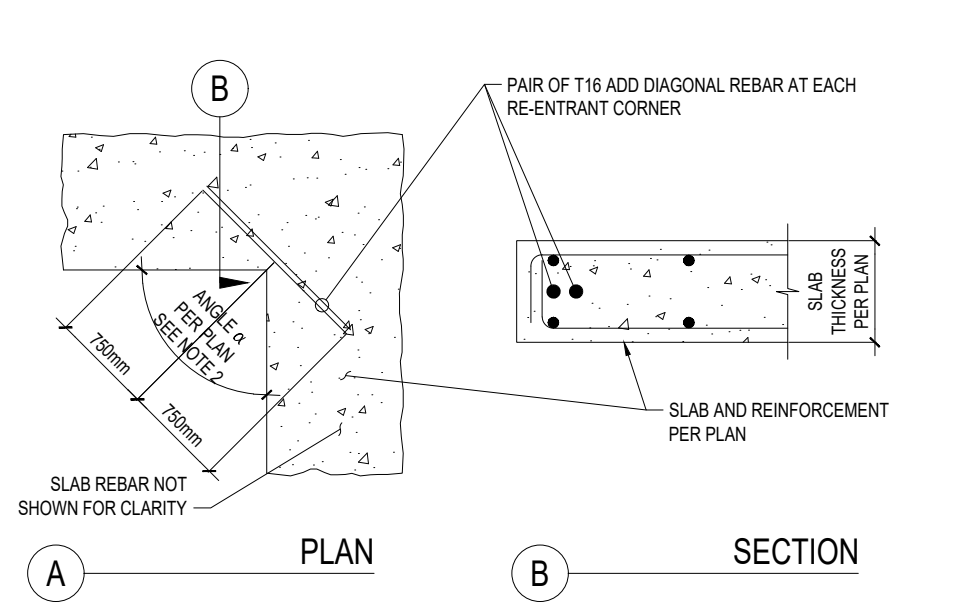


- ADD DIAGONAL REBAR AT RE-ENTRANT CORNERS**
- NOTES:**
- SCOPE: THIS DETAIL ADDRESSES THE PLACEMENT OF DIAGONAL REBAR IN ADDITION TO THE SLAB REBAR SPECIFIED ON PLANS. IN CORRESPONDENCE OF RE-ENTRANT SLAB CORNERS.
 - PROVIDE ADD DIAGONAL REBAR FOR ANGLES "C" UP TO 180°.
 - SUPPORTS IN PROXIMITY OF THE RE-ENTRANT CORNER MAY OR MAY NOT BE PRESENT, AND DO NOT AFFECT THE INSTALLATION OF THE DIAGONAL REBAR.

ADD REBAR AT WALL CORNER

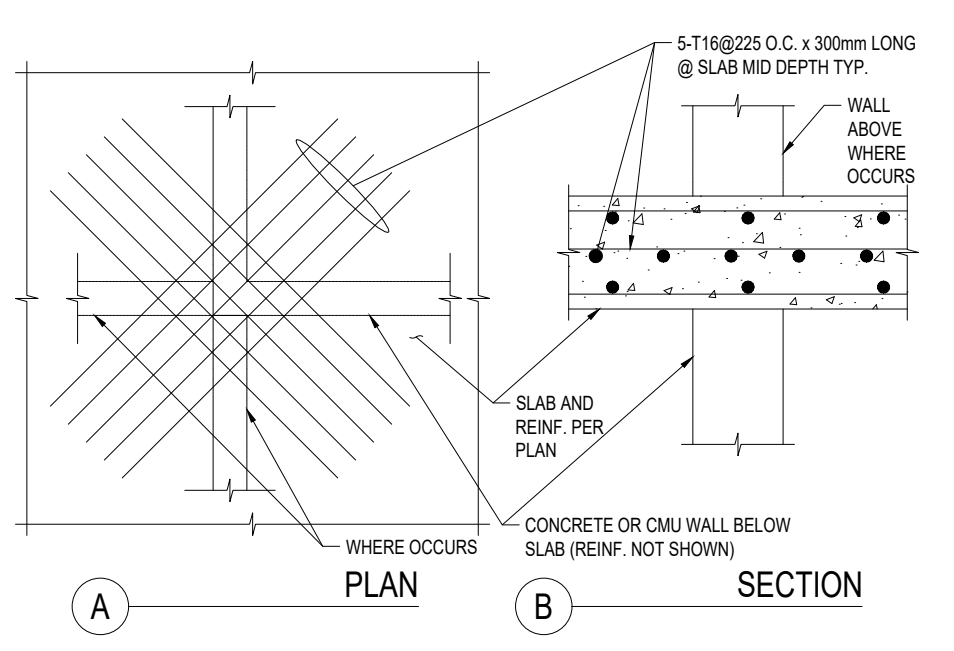

- NOTES:**
- PROVIDE ADDITIONAL REBAR AS SHOWN IN SLAB SUPPORTED BY CONCRETE OR CMU WALL IN CORRESPONDENCE TO WALL CORNERS
 - IF SLAB TERMINATES AT CORNER WALLS, PROVIDE ADDITIONAL REINFORCEMENT PER "ADD REBAR @ SUPPORTED CORNER" TYPICAL DETAIL

ADD REBAR AT WALL CORNER

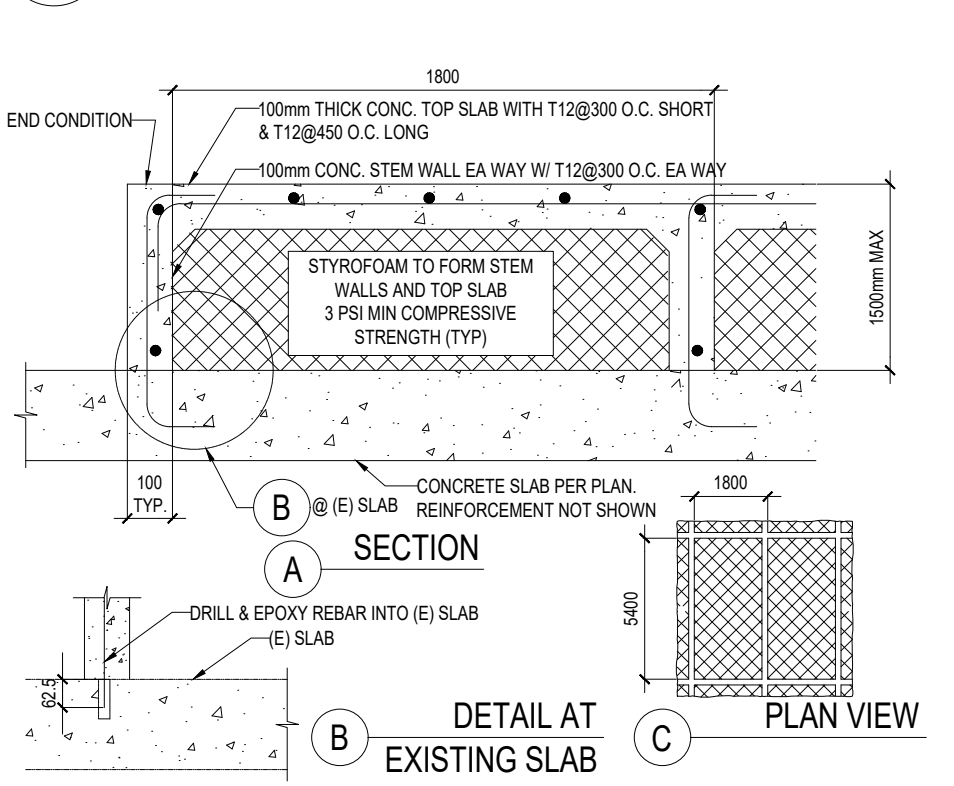


- NOTES:**
- PROVIDE BUILD UP SLAB WHERE SPECIFIED ON PLANS
 - MAX. LL = 100 PSF. DO NOT USE AT FIRE TRUCK LANES OR ANY AREA SUBJECT TO TRUCK LOADING. CONTACT S.E. OR R.

TYP. BUILT UP SLAB

GENERAL NOTES

- This Drawing Issue has been checked and approved in accordance with the LOCI Quality Management System.
- All works shall be carried out in accordance with particular B general specifications, in conjunction with relevant conditions of contract.
- This drawing shall not be used directly for construction, but for preparation of Shop Drawings in coordination with other disciplines and Suppliers prior to manufacture, delivery and execution on site.
- All dimensions and levels are in millimeter, unless noted otherwise, only written dimensions to be followed and not scaled from the drawing.
- All dimensions to be verified at site and coordinated with other disciplines/ manufacturers in the preparation of shop drawings. Any changes shall be validated by the consultant.
- For elements with indicative design, the contractor / supplier shall submit complete construction details and technical specifications for approval prior to execution. Shop drawings to particularly incorporate details at structural expansion joints as well as expansion / contraction joints needed for the respective materials/ finishes / related works.
- Safety standards and statutory regulations shall be adhered to in the manufacture, supply, storage and installation of all works.
- Any discrepancy or ambiguity whatsoever with dimensions / details / legends / specifications / etc, shall be brought to the attention of the Consultant and clarification obtained prior to finalization of tender / construction.

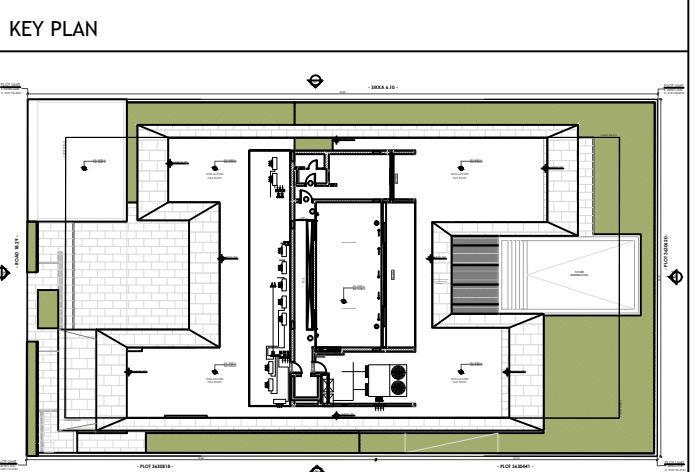

DRAWING REVISIONS

REV	DATE	DESCRIPTION	CHECKED	APPROVED
00	14.03.2025	ISSUED FOR APPROVAL	AN	BR

CLIENT

TARUN HARISH CHANDRA KHANNA

DRAWING DETAILS

TYPICAL DETAILS - (SHEET 5 OF 10)

SHEET #

269-S-014

REVISION

R0

ISSUE DATE:

14-03-2025

SCALE @ A1

AS SHOWN

PROJECT DETAILS

KHANNA VILLA



PROJECT LOCATION

PLOT NO. 3630160

Al Manara, Dubai

PROJECT PHASE

DETAIL DESIGN

CONSULTANT

LOCI

Office M31, KIA Flagship Building Zayed Rd, Al Quoz 1 P. O. Box 72928, Dubai

T +971 4 357 6573

W www.loci.ae