




BEAM TYPE - 1

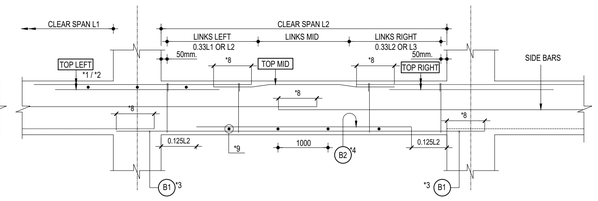


BEAM TYPE - 2

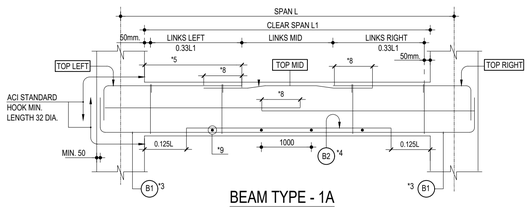


BEAM TYPE - 1A



BEAM TYPE - 2A



BEAM TYPE - 3

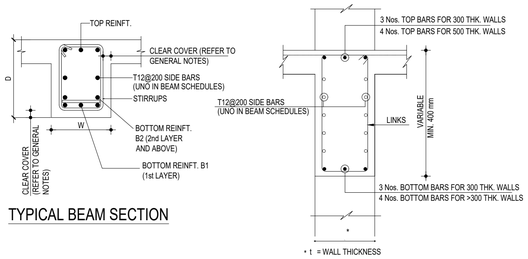


TYPICAL BEAM SECTION

*1	FIRST TOP REINF. SHALL EXTEND INTO SPAN L1 AND L2 BY A DISTANCE OF 0.33L WHERE L IS GREATER OF L1 AND L2.	*6	FIRST REINF. LAYER SHALL EXTEND INTO SPAN L2 BY A DISTANCE OF 1 1/2 L1 OR 1/3 L2 OR Ld, WHICHEVER IS GREATER FROM THE FACE OF THE SUPPORT.
*2	SECOND TOP REINF. SHALL EXTEND INTO EACH OF THE ADJACENT SPANS BY A DISTANCE OF ONE QUARTER OF EACH RESPECTIVE SPAN FROM THE FACE OF THE SUPPORT.	*7	SECOND REINF. LAYER SHALL EXTEND INTO SPAN L2 BY A DISTANCE OF 3/4 L1 OR 1/4 L2 OR Ld, WHICHEVER IS GREATER FROM THE FACE OF THE SUPPORT.
*3	FOR 50% OF BOTTOM BARS (2 BARS MIN.) PROVIDE STD. HOOK AT WALL AND COLUMNS. EXTEND 150mm INTO SUPPORT FOR REMAINDER OF BARS.	*8	TENSION LAP SPLICE PER "DEVELOPMENT AND SPLICE OF REBAR IN CONCRETE" IN TYPICAL DETAILS.
*4	B2 CAN BE PLACED IN 1 LAYER OR MORE LAYERS. SPACERS ARE ONLY NECESSARY FOR TWO OR MORE LAYERS.	*9	SPACERS FOR 2 LAYERS MIN. 25Ø OR MAIN BAR Ø WHICHEVER IS GREATER, WHERE SPACERS ARE NECESSARY.
*5	GREATER OF 0.33L1 OR 0.33L2 OR Ld MIN		


NOTES:

1. FOR DETAILS OF BARS SEE BEAM SCHEDULE
2. MAXIMUM CLEAR DISTANCE BETWEEN SIDE BARS = 250mm. MAX U.N.O

1 / - CONCRETE BEAM REINFORCEMENT TYPICAL DETAILS — SCALE: N.T.S.




7 / - HOOK DIMENSIONS — SCALE: N.T.S.

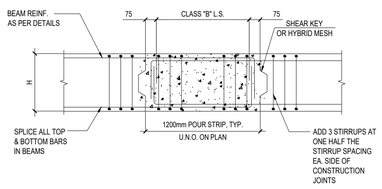

NOTES:

1. KEEP END OF BEAMS AND ADJACENT BAYS SHORED UNTIL STRIP IS CAST AND CONCRETE HAS ATTAINED SPECIFIC STRENGTH (14 DAYS MIN.)
2. CLOSURE STRIP TO BE POURED WITH LOW-SHRINK CONCRETE NOT LESS THAN 60 DAYS AFTER STRESSING, U.N.O.
3. SHRINKAGE STRIPS EXTENDED INTO ADJACENT R.C. SLABS.
4. ROUGHEN & CLEAN JOINTS & WET PRIOR TO PLACING CONCRETE


8 / - TYP. POUR STRIP IN CONC. BEAM — SCALE: N.T.S.

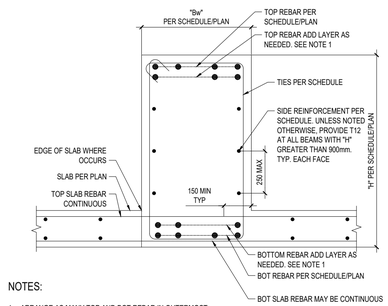


NOTES:

1. ARRANGE AS MANY TOP AND BOT REBAR IN OUTERMOST LAYERS AS MIN HORIZONTAL CLEAR SPACING ALLOWS. REBAR THAT CANNOT BE ARRANGED IN OUTERMOST LAYER SHALL BE ARRANGED IN ADD LAYERS.

10 / - INVERTED CONCRETE BEAM DETAIL — SCALE: N.T.S.

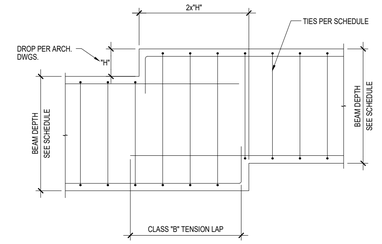


11 / - STEPPED BEAM DETAIL — SCALE: N.T.S.

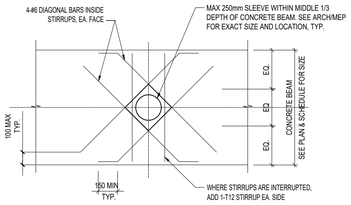


NOTES:
1. BEAM LONGITUDINAL BARS NOT TO BE INTERRUPTED
2. THIS DETAILS APPLIES ONLY WHERE EXPLICITLY NOTED ON PLAN

2 / - ADD REINF. AT BEAM HOIRZ. PENETRATION — SCALE: N.T.S.

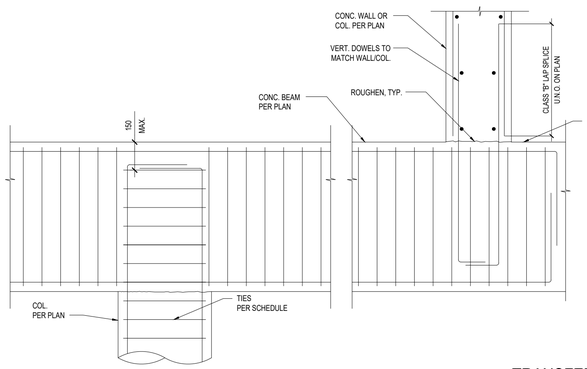


4 / - TRANSFER BEAM DETAIL — SCALE: N.T.S.




(1) T20 EA WAY FOR MEMBERS UP TO 175mm WIDE
(2) T20 EA WAY FOR MEMBERS 200mm TO 500mm WIDE
(4) T20 EA WAY FOR MEMBERS 500mm TO 1000mm WIDE
T20@300 EA WAY FOR MEMBERS WIDER THAN 1000mm

NOTE:
CONTRACTOR TO SUBMIT LOCATIONS OF CONSTRUCTION JOINTS TO THE STRUCTURAL ENGINEER FOR APPROVAL.

3 / - CONC. BEAM CONSTRUCTION JOINT — SCALE: N.T.S.




5 / - BEAM PERP. TO SLAB STEP — SCALE: N.T.S.

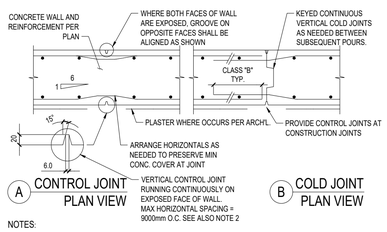


NOTES:


1. CONTROL JOINTS SHALL BE PLACED TO HELP REDUCE RANDOM SHRINKAGE CRACKING ON THE EXPOSED FACE OF CONCRETE WALLS, WITH OR WITHOUT PLASTER. PLASTERED WALL SHOULD HAVE REVEALS IN CORRESPONDENCE TO THE CONTROL JOINTS. OBTAIN REVEAL IN PLASTER DETAIL FROM PROJECT ARCHITECT
2. VERIFY LAYOUT WITH AND OBTAIN APPROVAL FROM PROJECT ARCHITECT PRIOR TO PLACING RUSTICATION STRIPS IN THE FORMORK
3. OBTAIN APPROVAL FROM BOTH ARCHITECT AND ENGINEER OF RECORD WHEN THE WALL IS A SHEAR WALL


6 / - VERICAL JOINTS ON CONCRETE WALL — SCALE: N.T.S.

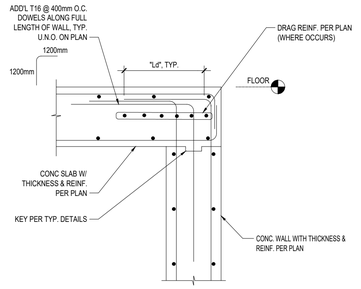

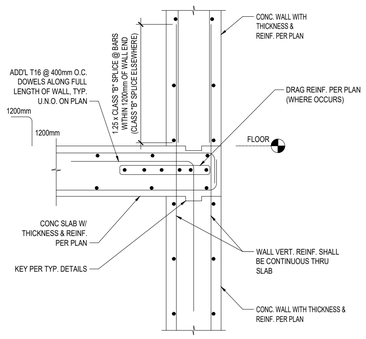

9 / - TYPICAL SHEAR TRANSFER AT SLAB — SCALE: N.T.S.

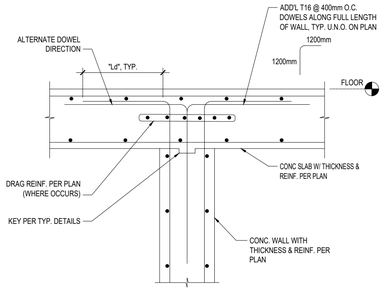


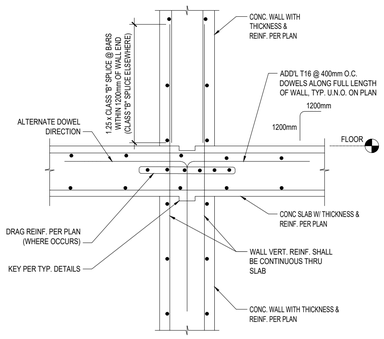

GENERAL NOTES

1. This Drawing Issue has been checked and approved in accordance with the LOCI Quality Management System.
2. All works shall be carried out in accordance with particular & general specifications, in conjunction with relevant conditions of contract.
3. This drawing shall not be used directly for Construction, but for preparation of Shop Drawings in coordination with other disciplines and Suppliers prior to manufacture, delivery and execution on site.
4. All dimensions and levels are in millimeter, unless noted otherwise. only written dimensions to be followed and not scaled from the drawing.
5. All dimensions to be verified at site and coordinated with other disciplines/ manufacturers in the preparation of shop drawings. Any changes shall be validated by the consultant.
6. For elements with indicative design, the contractor / supplier shall submit complete construction details and technical specifications for approval prior to execution. shop drawings to particularly incorporate details at structural expansion joints as well as expansion / construction joints needed for the respective materials/ finishes / related works.
7. Safety standards and statutory regulations shall be adhered to in the manufacture, supply, storage and installation of all works.
8. Any discrepancy or ambiguity whatsoever with dimensions / details / legends / specifications / etc, shall be brought to the attention of the Consultant and clarification obtained prior to finalization of tender / construction.

KEY PLAN



DRAWING REVISIONS

REV	DATE	DESCRIPTION	CHECKED	APPROVED
00	14.03.2025	ISSUED FOR APPROVAL	AN	BR

CLIENT

TARUN HARISH CHANDRA KHANNA

DRAWING DETAILS

TYPICAL DETAILS - (SHEET 7 OF 10)

SHEET #

269-S-016

REVISION: R0 | ISSUE DATE: 14-03-2025 | SCALE @ A1: AS SHOWN

PROJECT DETAILS

KHANNA VILLA



PROJECT LOCATION

PLOT NO. 3630160
Al Manara,
Dubai

PROJECT NUMBER

269

PROJECT PHASE

DETAIL DESIGN

CONSULTANT

LOCI لوكاي
Office M31, KIA Flagship Building
Sheikh Zayed Rd, Al Quoz I
P. O. Box 72928, Dubai
T +971 4 357 6573
W www.loci.ae