

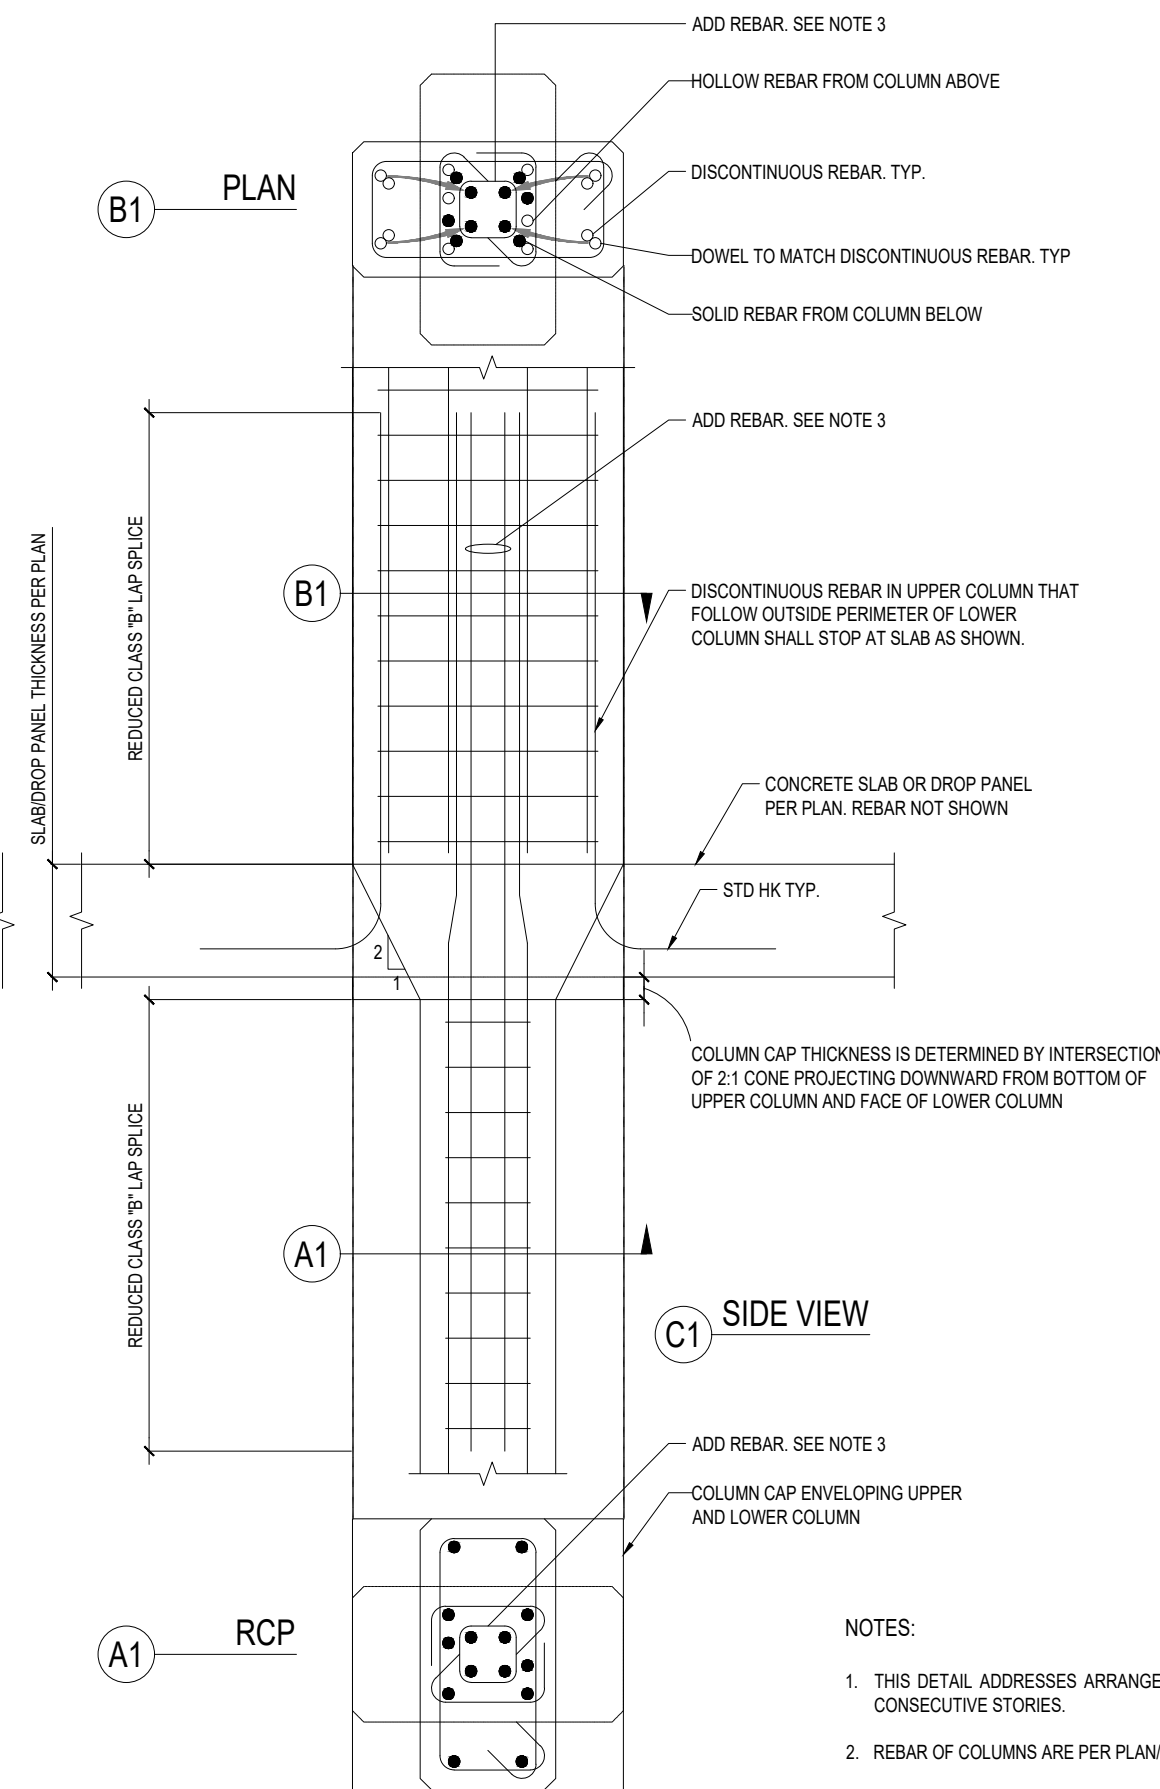


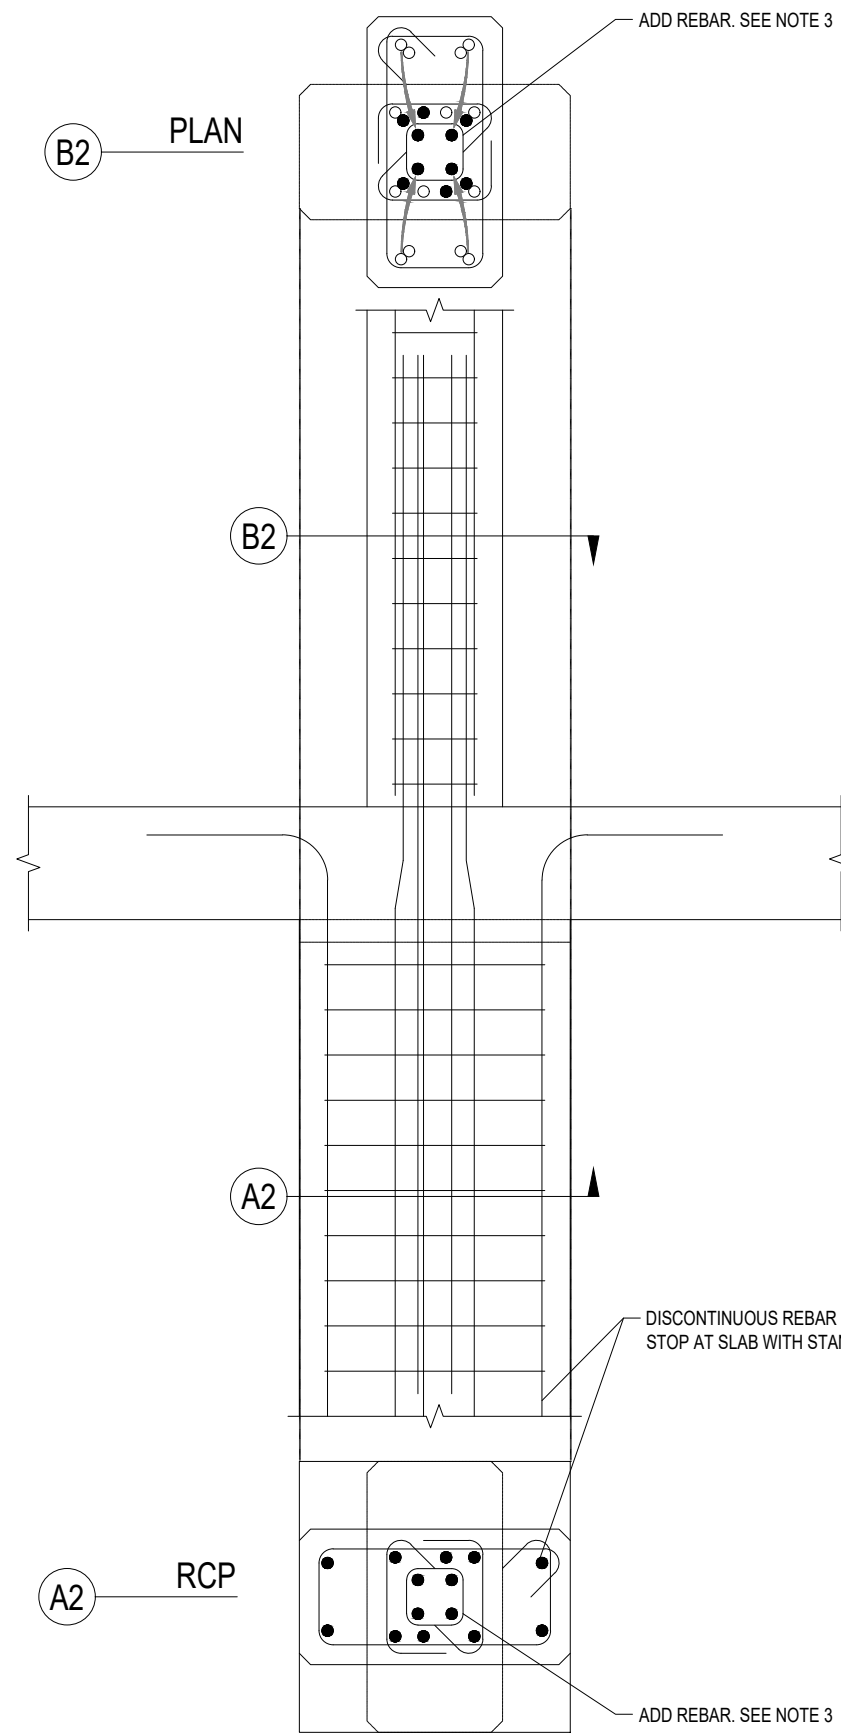

COLUMN ROTATED AT ADJACENT LEVELS
SCALE: N.T.S.

NOTES:


1. THIS DETAIL ADDRESSES ARRANGEMENT OF REBAR OF OFFSET COLUMNS BETWEEN TWO CONSECUTIVE STORIES.
2. REBAR OF COLUMNS ARE PER PLAN/COLUMN SCHEDULE OR ELSEWHERE IN THE DRAWING SET.
3. ADD REBAR THAT MATCH NO. AND SIZE OF DISCONTINUOUS REBAR FROM UPPER COLUMN. ADD REBAR SHALL EXTEND CONTINUOUSLY INTO UPPER AND LOWER COLUMN CORE AS SHOWN.
4. MAX OFFSET IS 1/3 OF B_u OR B_l, WHICHEVER IS SMALLER.

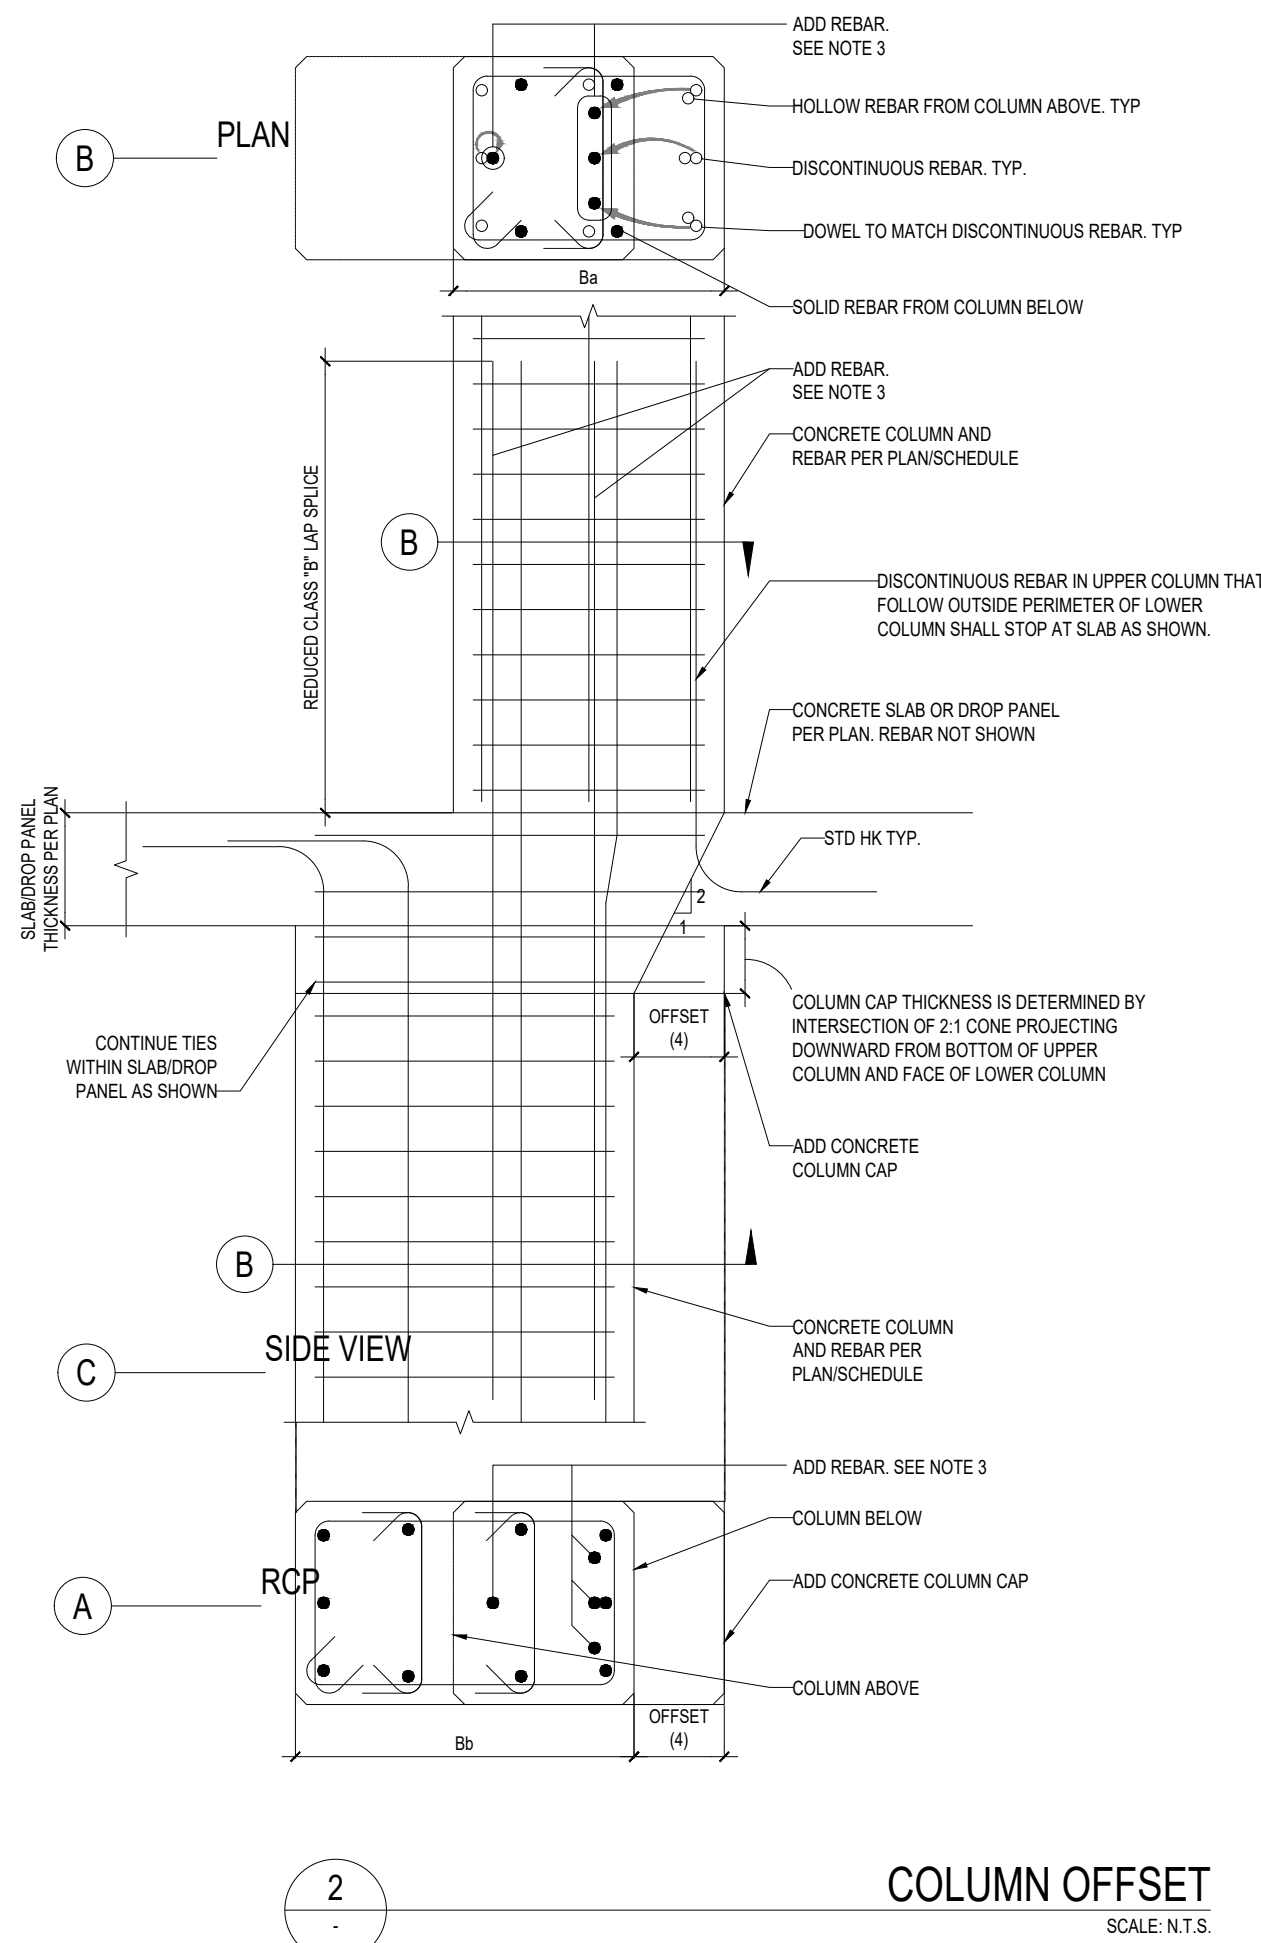


COLUMN OFFSET
SCALE: N.T.S.

NOTES:

1. CONDUITS PLACEMENT TO CONFORM TO THE REQUIREMENTS OF UBC1997.
2. THE TOTAL AREA OF EMBEDDED CONDUITS SHALL NOT EXCEED 1% OF THE CROSS AREA (B x H).
3. CONDUITS TO BE SECURED TO COLUMN TIES.
4. TYPICAL DETAILS TO BE READ IN CONJUNCTION WITH COLUMN SCHEDULE.
5. FOR LAP LENGTHS AND REFER GENERAL NOTES.
6. L_o = 0.25 L_c.
7. STANDARD COG LENGTH TO BE 30 x BAR DIAMETER U.N.O.

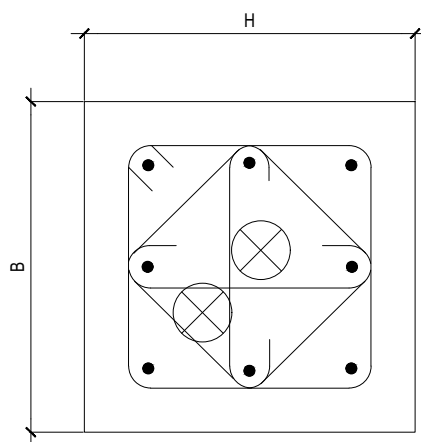


CONDUITS PLACEMENT IN COLUMNS
SCALE: N.T.S.

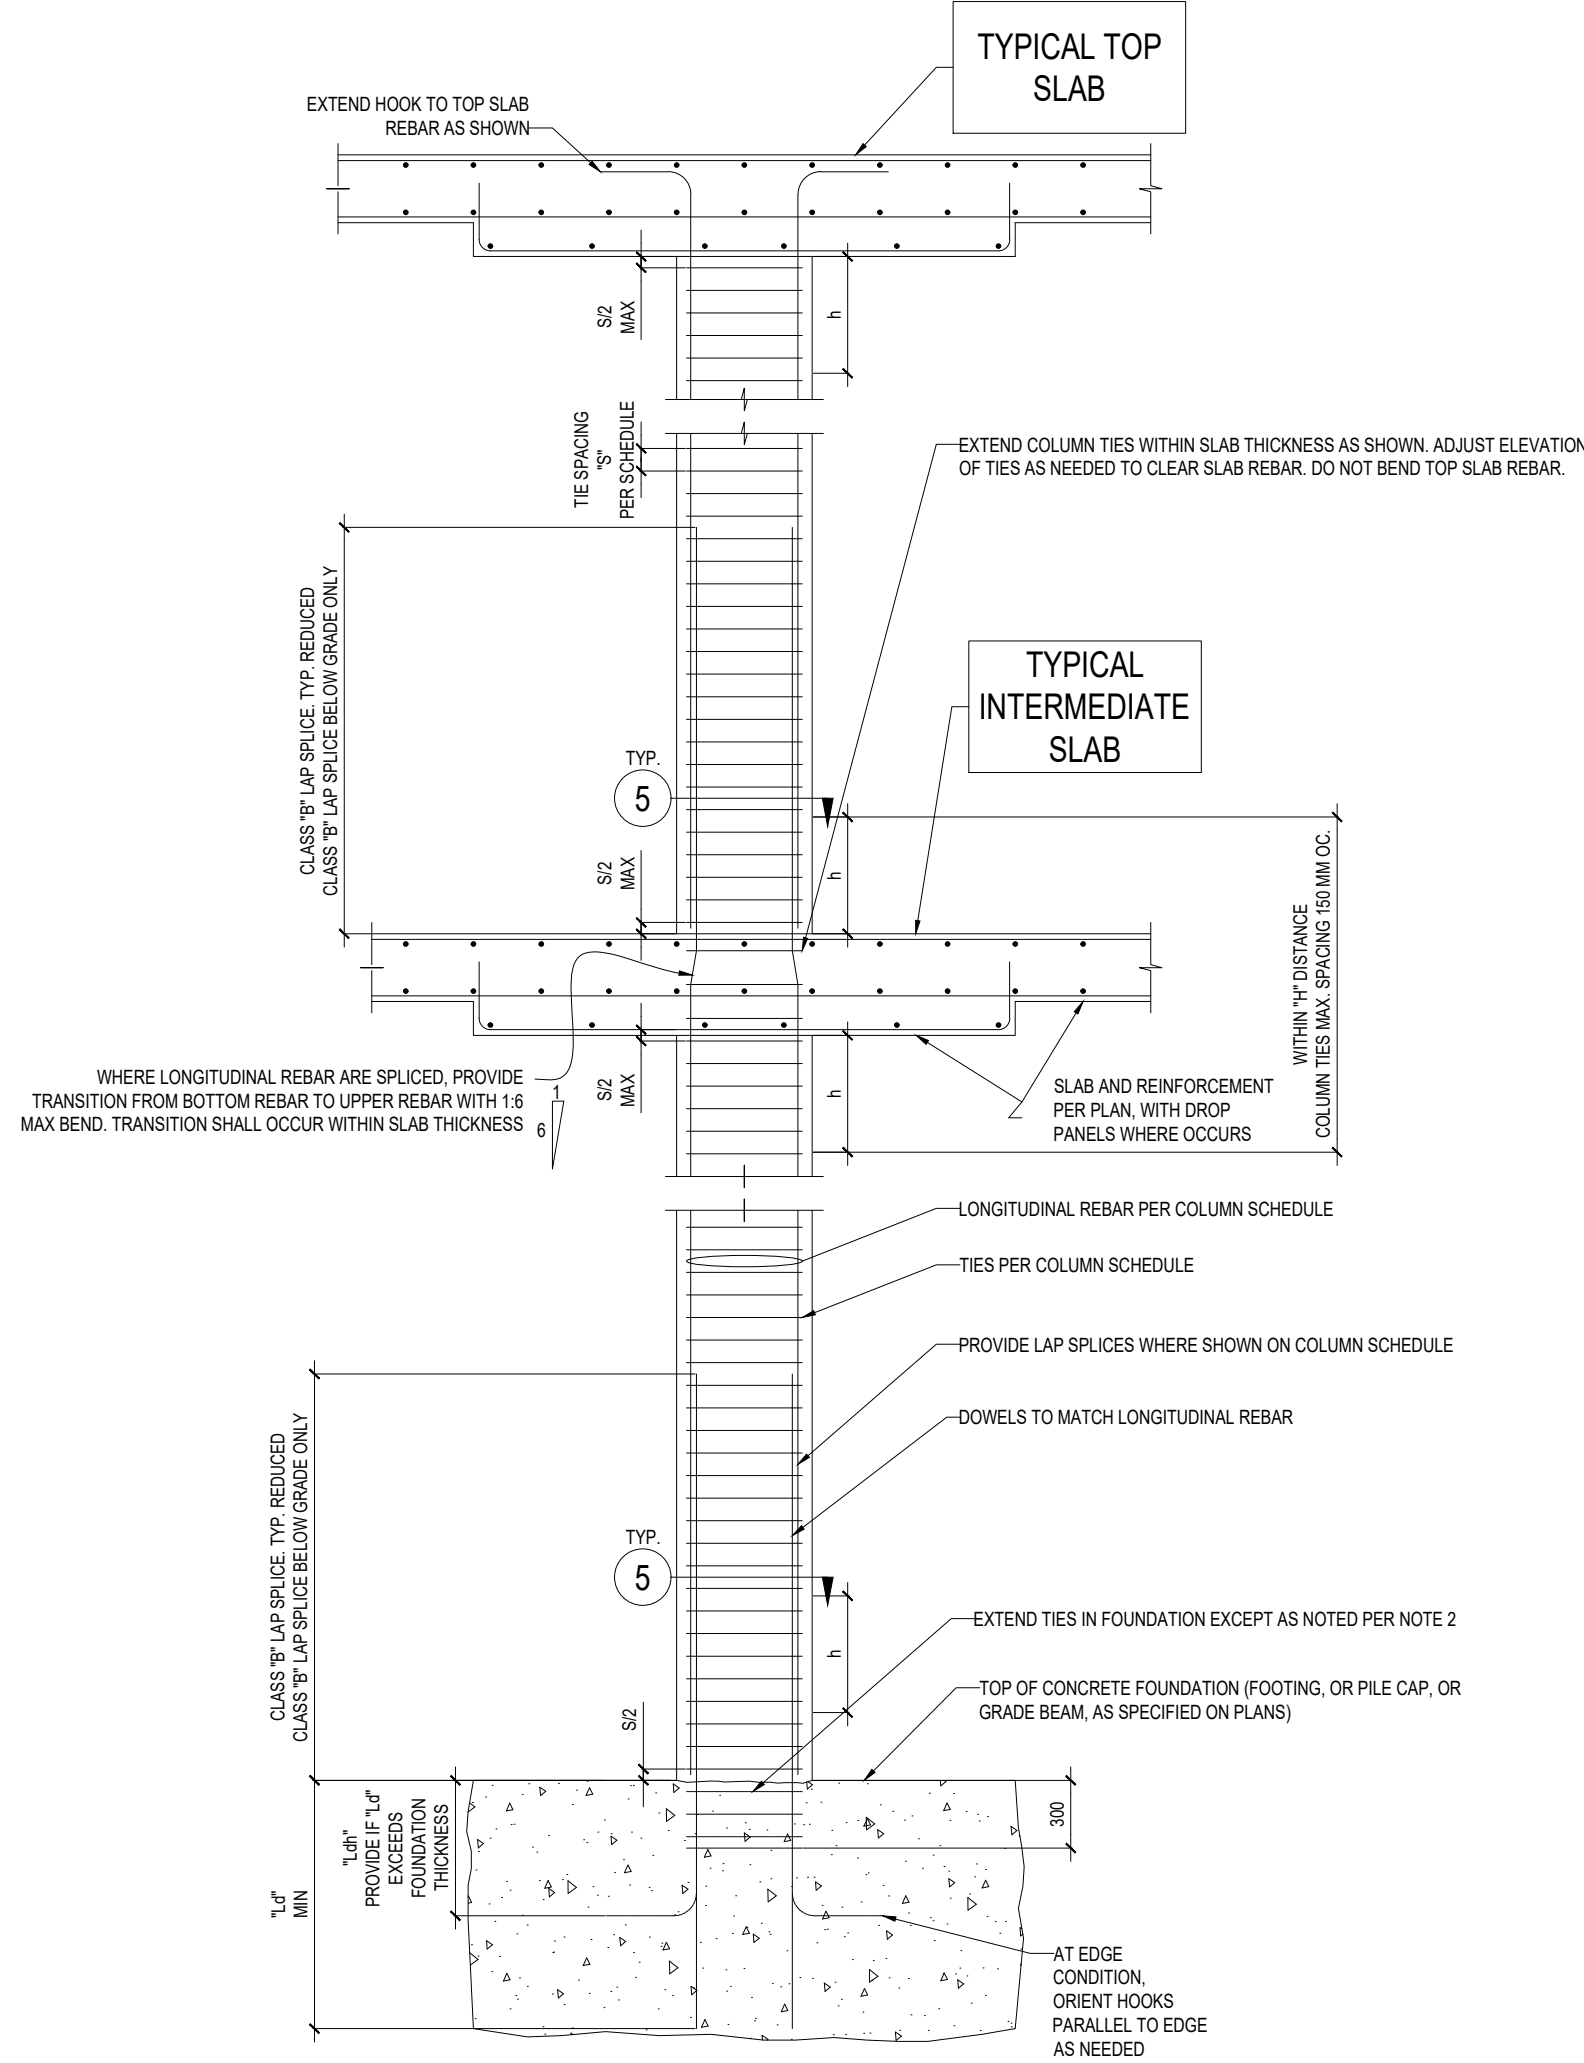

NOTES:

1. THIS DETAIL ADDRESSES CONCRETE COLUMN CONSTRUCTION. OTHER ELEMENTS, SUCH AS SLAB, DROP PANELS, AND FOUNDATION, ARE SPECIFIED ELSEWHERE IN THE DRAWING SET, AND SHOWN HERE FOR REFERENCE ONLY.
2. COLUMN TIES IN FOOTING MAY BE OMITTED AT FOUNDATION OF FLOOR ENTIRELY UNDERGROUND.
3. T_h = LARGEST OF $\frac{1}{4} \times$, $\frac{2}{3} \times 0.17 L_c$, 500mm. WHERE 'Y' IS THE LARGER COLUMN PLAN DIMENSION, AND 'L_c' IS THE CLEAR COLUMN HEIGHT.
4. ALL THE VERTICAL REBAR MUST BE IN DIRECT CONTACT WITH TIES AND CROSS TIES AS SHOWN.

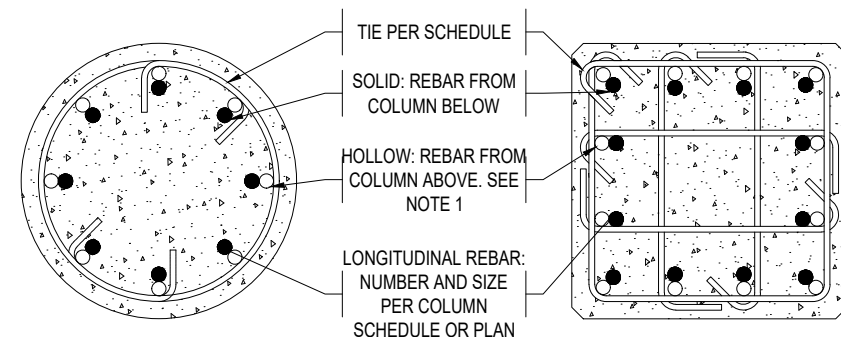


TYPICAL CONCRETE COLUMN REINF.
SCALE: N.T.S.

GENERAL NOTES

1. This Drawing Issue has been checked and approved in accordance with the LOCI Quality Management System.
2. All works shall be carried out in accordance with particular & general specifications, in conjunction with relevant conditions of contract.
3. This drawing shall not be used directly for Construction, but for preparation of Shop Drawings in coordination with other disciplines and Suppliers prior to manufacture, delivery and execution on site.
4. All dimensions and levels are in millimeter, unless noted otherwise, only written dimensions to be followed and not scaled from the drawing.
5. All dimensions to be verified at site and coordinated with other disciplines/ manufacturers in the preparation of shop drawings. Any changes shall be validated by the consultant.
6. For elements with indicative design, the contractor / supplier shall submit complete construction details and technical specifications for approval prior to execution. Shop drawings to particularly incorporate details at structural expansion joints as well as expansion / construction joints needed for the respective materials/ finishes / related works.
7. Safety standards and statutory regulations shall be adhered to in the manufacture, supply, storage and installation of all works.
8. Any discrepancy or ambiguity whatsoever with dimensions / details / legends / specifications / etc, shall be brought to the attention of the Consultant and clarification obtained prior to finalization of tender / construction.

KEY PLAN

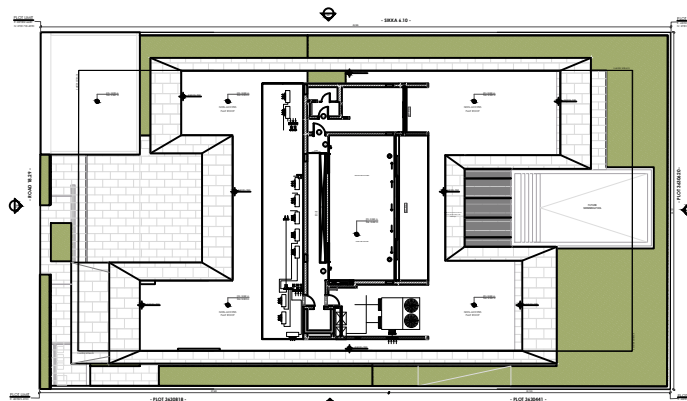

DRAWING REVISIONS

REV	DATE	DESCRIPTION	CHECKED	APPROVED
00	14.03.2023	ISSUED FOR APPROVAL	AN	BR

CLIENT

TARUN HARISH CHANDRA KHANNA

DRAWING DETAILS

TYPICAL DETAILS - (SHEET 10 OF 10)

SHEET #

269-S-019

REVISION

R0

ISSUE DATE:

14-03-2023

SCALE @ A1

AS SHOWN

PROJECT DETAILS

KHANNA VILLA



PROJECT LOCATION

**PLOT NO. 3630160
Al Manara,
Dubai**

PROJECT NUMBER

269

PROJECT PHASE

DETAIL DESIGN

CONSULTANT

LOCI
لوکار

Office M31, KIA Flagship
Building
Sheikh Zayed Rd, Al Quoz 1
P. O. Box 72928, Dubai
T +971 4 357 6573
W www.loci.ae